

ADVANCING ARCHERY'S LEGACY





X10 ®

EASTON

The Most-Winning Recurve Arrow Ever.

SPECIFICATIONS

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim Amount ²	Recommended Point Weight Range
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains
1000	5.3	1.000	28	No limit	90-110
900	5.8	0.900	28	No limit	90-110
830	6.2	0.830	28 _{1/2}	No limit	90-110
750	6.4	0.750	29	3.5	100-110
700	6.7	0.700	29	3.5	100-110
650	6.8	0.650	29	3.5	100-110
600	7.0	0.600	30	4.5	100-110
550	7.5	0.550	31	3.5	100-120
500	7.8	0.500	32	4.0	100-120
450	8.1	0.450	331/2	5.5	100-120
410	8.5	0.410	333/4	5.5	100-120
380	8.9	0.380	333/4	6.5	100-120
350	8.8	0.350	34	6.0	100-120
325	9.2	0.325	341/4	6.0	100-120

- 1 Due to the barrel design of the X10, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weight 6-7 grains
- ${\bf 2} \,\, {\bf Recommended} \,\, {\bf that} \,\, {\bf no} \,\, {\bf more} \,\, {\bf than} \,\, {\bf these} \, {\bf lengths} \,\, {\bf be} \,\, {\bf cut} \,\, {\bf from} \,\, {\bf the} \,\, {\bf front} \,\, {\bf of} \,\, {\bf the} \,\, {\bf shaft}.$

INSERTS AND POINTS

X10 Stainless Steel Break-off (100/110/120—80/90/100 gr.) X10 Ballistic Tungsten Break-off





(4 gr.)

(100/110/120 gr.)



Detailed Componenet Specifications pp. 24

MADE IN USA

INSERTS AND POINTS

X10 Stainless Steel Break-off (100/110/120—80/90/100 gr.)



X10 Ballistic Tungsten Break-off (100/110/120 gr.)







SPECIFICATIONS

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim Amount ²	Recommended Point Weight Range
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains
770	6.0	0.770	29	No limit	90-110
720	6.2	0.720	291/2	No limit	90-110
670	6.5	0.670	293/4	4.0	100-110
620	6.7	0.620	30	4.5	100-110
570	6.9	0.570	31	5.0	100-120
520	7.3	0.520	32	5.5	100-120
470	7.6	0.470	331/4	6.0	100-120
420	8.0	0.420	333/4	6.5	100-120
380	8.4	0.380	34	7.0	100-120

- 1 Due to the taper design of the X10 Pro Tour, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger-diameter nock end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6-7 grains.
- 2 Recommended that no more than these lengths be cut from the front of the shaft.

The Most-Winning Compound Arrow Ever.

X10 PROTOUR TO

X10 PROTOUR

- → High-modulus carbon fiber bonded to a 7075 alloy core
- ◆ 9-micron polished carbon finish
- → Guaranteed straightness ± .0015"
- → Weight tolerance: ± 0.5 grains
- → Components—sold separately
- → Tapered Design

REO WILDE USA

- 8

MADE IN USA

EASTON.

→ High modulus carbon fiber bonded to a precision 7075 aerospace alloy core tube

→ Polished Carbon Finish
→ Guaranteed Straightness: ± .0015"
→ Weight modulus: ± 0.5 grains

Components—sold separately
 Barreled Design

X10[®]

A/C/E®

EASTON.

→ Lightweight carbon fiber bonded

→ Guaranteed straightness ± .002"

→ Weight tolerance: ± 1.0 grains ◆ Components—sold separately

SARA LOPEZ COL

A/C/G™

to a 7075 alloy core

→ Parallel Design

The Arrow that Started it All. Lighter, Faster, More Precise.

SPECIFICATIONS


Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim mount ³	Recommended Point Weight Range
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains
1250 ²	5.1	1.250	26 ⁵ /8	No limit	60-70
1100 ²	5.1	1.100	28 ⁵ /8	No limit	70-80
1000	5.7	1.000	28 ⁵ /8	No limit	70-80
920	5.8	0.920	28 ⁵ / ₈	9.5	70-80
850	5.7	0.850	28 ⁵ / ₈	No limit	70-80
780	6.0	0.780	29 ⁵ / ₈	No limit	80-90
720	6.4	0.720	29 ⁵ / ₈	6.0	80-90
670	5.9	0.670	30 ⁵ / ₈	No limit	80-90
620	6.1	0.620	30 ⁵ / ₈	No limit	90-100
570	6.3	0.570	31 ⁵ / ₈	10.0	90-100
520	6.7	0.520	31 ⁵ / ₈	4.5	90-100
470	6.8	0.470	32 ⁵ / ₈	6.5	90-110
430	7.0	0.430	32 ⁵ /8	5.5	100-120
400	7.5	0.400	32 ⁵ /8	4.0	100-120
370	7.9	0.370	32 ⁵ /8	4.0	110-120

- 1 Due to the barrel design of the A/C/E, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 5-6 grains.
- 2 Available as a special order only. Replaced with A/C/C -00 sizes.
- 3 Recommended that no more than these lengths be cut from the front of the shaft

INSERTS AND POINTS







A/C/E Insert (39, 49, 59 gr.)











MADE IN USA

INSERTS AND POINTS

A/C/E Stainless Steel Break-off Point: (60/70/80—80/90/100—100/110/120 gr.)

(39, 49, 59 gr.)

Pin Nock™

4 (2 gr.)







(4 gr.)

(7 gr.)

A/C/E Pin

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Recommended Point Weight Range
	Grains per Inch	Deflection in Inches	Inches	Grains
1500	4.7	1.500	28	50-70
1300	5.1	1.300	281/2	50-70
1150	5.5	1.150	281/2	50-70
1000	5.5	1.000	29	70-80
880	5.9	0.880	291/2	70-80
810	6.1	0.810	30	80-90
710	6.5	0.710	301/2	80-90
660	6.9	0.660	30¾	80-90
610	7.3	0.610	31	80-90
540 ¹	7.7	0.540	31½	100
480 ¹	8.4	0.480	32	100-110
430 ¹	8.9	0.430	321/2	100-110

430, 480, 540 sizes use unique A/C/G point and nock pin. All others use A/C/E points and nock pins.

A/C/E® Insert and Point System 5-44 Thread

A/C/E Insert	#2-31gr.	#3-36gr.	#4-41gr.	#5-46gr.	#6-51gr.
Screw-in Point		Total '	Weight (grains)—In	sert and Point	107 - 1 () ()
H - 39gr.	70	75	80	85	90
J - 49gr.	80	85	90	95	100
L - 59gr.	90	95	100	105	110

Precision Performance & Value in One Do-it-all Arrow.

MADE IN USA



A/C/E®

to a 7075 alloy core

→ Barreled Design

→ High-modulus carbon fiber bonded

→ Guaranteed straightness ± .0015"

→ Components—sold separately

→ Weight tolerance: ± 0.5 grains

A/C/C

The Arrow for Everything with a Size for Everyone.

SPECIFICATIONS

					UNI ¹ S	ystem		One-P	iece Para	bolic Point		NIBB	RPS I	nserts ⁴	
Size	Shaft Weight	Spine @ 28" Span	Stock Length	Point/ Insert Sizes	Bushing	G Nock²	Heavy Wt.	Med. Wt.	Light Wt.	Extra Light Wt.	Hyper Light Wt.	Point Two-piece	Halfout	Alum.	RPS Point ⁵
100	Grains per Inch	Deflection in Inches	ln.		Gr.	Gr.	Gr.	Gr. ³	Gr. ³	Gr. ³	Gr. ³	Gr. ³	Gr.s ³	Gr. ³	0.D. In.
2-00	4.7	1.500	28	-00*	_	7	*	50*	*	*	*	_	_	_	_
3L-00	5.1	1.300	281/2	-00*	_	7	*	50*	*	*	*	_	_	_	_
3-00	5.5	1.150	281/2	-00*	_	7	*	*	*	50*	*	_	-	_	_
2L-04	6.1	1.020	29	-04	2	7	100	80	70	60	50	_	_	_	
2-04	6.5	0.920	291/2	-04	2	7	100	80	70	60	50	_	_		_
3X-04	6.7	0.830	291/2	-04	2	7	100	80	70	60	50	_	_		
3L-04	7.0	0.750	30	-04	2	7	100	80	70	60	50	_	_	_	_10
3-04	7.2	0.680	30	-04	2	7	100	80	70	60	50	_	_	_	
3L-18	7.5	0.620	31	-18	3	7	-	100	82	70	60	70	16	_	17/64
3-18	7.8	0.560	31	-18	3	7	_	100	82	70	60	70	16	_	17/64
3-28	8.1	0.500	311/2	-28	4	7	_	100	87	70	60	70	18	_	17/64
3-39	8.6	0.440	311/2	-39	5	7	_	100	85	70	60	70	22	_	9/32
3-49	8.8	0.390	32	-49	6	7			100	80	70	80		9	9/32
3-60	9.5	0.340	321/2	-60	7	7	1	_	108	90	80	90	_	11	5/16
3-71	9.9	0.300	33	-71	8	7	_	_	114	90	80	90	_	14	5/16

- 1 UNI-Universal Nock Installation System.
- 2 G Nock available in black, white, green, blue, deep red, orange, red, and comes in .088" and .098" string groove sizes.
- 3 NIBB Point grain weights are ± 0.5 grains; all other components are ± 1 grain 4 RPS=Replaceable Point System.
- 5 RPS target points available in 50-125 grains.
- * A/C/C -00 sizes use the same size core tube as A/C/E shafts and may use all A/C/E points, inserts, and nocks.

INSERTS AND POINTS

A/C/C NIBB Point



A/C/C One-piece Parabolic Point











UNI Bushing

MADE IN USA


INSERTS AND POINTS



Carbon One Stainless Steel Break-off (70/80/90—90/100/110 gr.—100/110/120 gr.)



(9 gr.)









G Pin[™] Nock ²

G Nock™

Pin Nock™

(2 gr.)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Point	Recommended Point Weight	Nock Pin Adapter	Nock
	Grains per Inch	Deflection in Inches	Inches				
1150 1000 900 810	5.0 5.0 5.3 5.8	1.150 1.000 .900 .810	28 1/8 28 3/8 28 3/4 29 1/8	Carbon One 90/80/70	70-80 70-80 80-90 80-90	A/C/E	Pin Nock G Pin Nock G Nock
730 660 600 550	6.0 6.6 6.9 6.9	.730 .660 .600 .550	29 3/4 30 3/8 30 3/4 31 3/32	Carbon One 110/100/90	90-100 90-100 100-110 100-110	Carbon One-1	Pin Nock G Pin Nock G Nock
500 450 410	7.4 8.1 8.5	.500 .450 .410	31 1/2 31 7/8 32 3/32	Carbon One 120/110/100	110-120 110-120 110-120	Carbon One-2	Pin Nock G Pin Nock G Nock

Affordable Precision.

CARBON ONE



- → High-strength carbon fibers
- ♦ Micro-smooth finish
- ◆ Straightness: ± .003"
- → Weight tolerance: ± 1 grain

EASTON.

- → Components—sold separately
- → Also uses A/C/E components
- Parallel Design



MADE IN USA



→ Parallel Design

A/C/CTM

→ Polished carbon finish

→ High-strength carbon fiber bonded to a precision 7075 alloy core tube

→ Guaranteed straightness: ± .002" ♦ Weight tolerance: ± 0.5 grains

→ Components—sold separately

PJ DELOCHE FRA

EASTON

APOLLO[™]

EASTON.

Beginner or Performance Short-Draw Shooters, Here's Your Arrow.

SPECIFICATIONS


Size	Shaft Weight	Spine	Stock Length	Recommended Point Size	Nock Pin Adapter	Nock
	Grains Per Inch	Deflection In Inches	Inches			
1200	5.5	1.200	27.5	Apollo	A/C/E	Pin Nock
1070	5.9	1.070	28	1-Piece 50 Grain		G Pin Nock G Nock
950	6.2	0.950	28.5	4.		
840	6.5	0.840	29	Apollo		Pin Nock
740	7.2	0.740	29.5	1-Piece 75 Grain	Carbon One - 1	G Pin Nock G Nock
670	7.7	0.670	30			UNUCK
610	8.1	0.610	30.5	Apollo	Carbon One - 2	Pin Nock
560	8.4	0.560	31	1-Piece 100 Grain		G Pin Nock G Nock


INSERTS AND POINTS






















MADE IN USA

INSERTS AND POINTS



(50/75 gr.)





SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Glue-In Point	Nock	
	Grains per Inch	Deflection in Inches	Inches	Grains	7400	
1400	6.7	1.400	27	50	G	
1200	7.2	1.200	271/4	50	G	
1000	7.2	1.000	271/2	50	G	
900	7.7	0.900	281/2	50	G	
750	8.1	0.750	291/2	50	G	
630	7.9	0.630	301/2	75	Χ	
570	8.2	0.570	311/2	75	Χ	

The Right Start at the Right Price.

INSPIRÉ



- → Small-diameter, micro-smooth carbon finish
- ◆ Available in seven sizes
- → Zinc one-piece points
- → Parallel Design

MADE IN USA

EASTON.

APOLLO™

→ Guaranteed straightness: ± .005"

→ Components—sold separately

→ Weight tolerance: ± 2.0 grain

→ Micro-smooth finish

→ Parallel Design

TRIUMPH

EASTON.

→ Specifically engineered for indoor and 3D

→ 23/64" (9.3mm) outside diameter

→ Multi-layer wrapped carbon fibers → Smooth matte black finish → Straightness: ± .003"

♦ Weight tolerance: ± 2.0 grains ◆ Super or G-UNI bushings installed ♦ Inserts, points and nocks — sold separately

FATBOYTM

The Pinnacle of Indoor Carbon Technology— Max Diameter & Precision.

SPECIFICATIONS

Size	Shaft Weight @ 28"	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	One-piece Point	
	Grains	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	
500	279	0.500	30 ¹ / ₄	13	8	12	7	16	100/125/150/175/200	
450	290	0.450	30 ³ / ₄	13	8	12	7	16	100/125/150/175/200	
400	298	0.400	31 ¹ / ₄	13	8	11	7	15	100/125/150/175/200	
350	312	0.350	31 ³ / ₄	13	8	11	7	15	100/125/150/175/200	

Triumph is World Archery Maximum Diameter Compliant in all Sizes.

INSERTS AND POINTS











Super UNI Bushing®



Super Nock® or 3D Super Nock®

INSERTS AND POINTS











SPECIFICATIONS

G Nock™

(7 gr.)


Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super¹ UNI Bushing	G Nock	G¹ UNI Bushing	FatBoy RPS Insert	One-piece Point	RPS Point ²
	Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains	O.D. Inches
500 400 340	7.1 7.8 8.3	0.500 0.400 0.340	31½ 32 33¼	13 13 13	8 8 8	9 9 9	7 7 7	13 13 13	40 40 40	80/100 80/100 80/100	11/32 11/32 11/32

1 Super or G-UNI Bushing factory installed. 2 RPS screw-in points available in 50-125 grains

*FatBoy meets the maximum diameter restriction for World Archery Tournaments.

A Proven Winner. Easy Tuning & High Performance.

FATBOYTM



einforcement for durability

hery 9.3mm O.D.

→ Super or G UNI bushings—sold separately

→ Components—sold separately

TRIUMPH

→ All four

World A

EASTON

X23[™] & X27[™]

EASTON.

→ 7178-T9 aerospace alloy

MADE IN USA

→ Hard-anodized black finish

→ Strength (psi): 105,000

X7 ECLIPSE™

→ Guaranteed straightness: ± .001" ♦ Weight tolerance: ± 3/4%

The Highest Precision & Tightest Tolerance. Period.

SPECIFICATIONS

Model Shaft Size Shaft Weight Spine @ 28" Span Stock Leng	UNI Bushing Super Nock RPS Insert One-Piece Point RPS Point
---	---

	8	Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	0.D. Inches
X ² 3	2312	9.5	0.423	33	11	13	37	100	11/32
X ² 3	2314	10.8	0.391	33.5	10	13	34	100	11/32
X ² 3	2315	11.8	0.340	34	11	13	37	100	11/32
X ² 7	2712	11.3	0.260	34.5	19	13	(-)	150/300	_ 0

INSERTS AND POINTS












G-UNI Bushing®



Super UNI Bushing (19 gr.)







MicroLite™ Super Nock®

SIZES

1514, 1614, 1714, 1814, 1914, 2014, 2112, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2613, 2712

• G-UNI or Super UNI Bushing—installed • Nocks and points—sold separately

X²3™& X²7™

- → 7178-T9 aerospace alloy diamond polished anodized silver finish
- → Guaranteed straightness: ± .001"
- ♦ Weight tolerance: ± 3/4%
- → Strength (PSI): 105,000
- → Components—sold separately

Super UNI Bushing





INSERTS AND POINTS

(13 gr.)



(19 gr.)

MicroLite™ Super Nock° (8 gr).



MADE IN USA

Perfect Precision. Precise Tuning. There's an Eclipse for Every Competitor.

X7 ECLIPSE



SUPERDRIVE

No Need to Pull a Ring When You're in the Middle.

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Super Nock	Microlite Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	Pin Nock Adapter	One-piece Point
	Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains
290	7.8	0.290	32	13	8	16	7	18	15	100/125

INSERTS AND POINTS








(19 gr.)



G Nock™







(13 gr.)





INSERTS AND POINTS



Full Bore One-piece Point (100/150/200 gr.) for 350 spine (100/200/250 gr.) for 270 spine



Super UNI Bushing®



EASTON.

FULL BORE™

→ Weight tolerance: ± 2.0 grains → 27/64" outside diameter

→ Black, smooth matte finish

→ Specifically engineered for indoor and 3D

→ Multi-layer wrapped carbon fibers → Super or G UNI bushings —included

♦ Inserts, points, and nocks —sold separately

→ Straightness: ± .003"





G Nock™ (7 gr.)



SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Super Nock	Microlite Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	One-piece Point
	Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains
350	8.4	0.350	32	13	8	19	7	21	100/150/200
270	9.0	0.270	32.125	13	8	19	7	21	100/200/250

Speed AND Precision. You Can Have Both.

FULL BORE



SUPERDRIVETM → Straightness: ± .002"

- ♦ Weight tolerance: ± 1.0 grain → 25/64" outside diameter
- ◆ Specifically engineered for indoor and 3D → Black, smooth matte finish
- → Multi-layer wrapped carbon fiber
- → Super or G UNI bushings—included
- → Inserts, points, and nocks sold separately
- → Pin Adapter—sold separately

EASTON.

XX75° GENESIS™



LIGHTSPEED™

→ Multi-layer wrapped carbon fibers

→ LightSpeed straightness: ± .003" → Weight tolerance: ± 2.0 grains → G-UNI Bushing—installed → Point—sold separately → G Nock—sold separately

→ Smooth matte black finish → 3D straightness: ± .001"

The Most Popular Beginner Arrow in the World.

INSERTS AND POINTS













SPECIFICATIONS

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	UNI Bushing ¹	G Nock	CB Insert	CB Point ²	RPS Point
	Grains per Inch	Grains	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	O.D. Inches
500	6.5	189	0.500	31½	12	7	21	80/100	9/32
400	7.4	215	0.400	32	12	7	21	80/100	9/32
340	8.2	238	0.340	32½	12	7	21	80/100	5/16

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	UNI Bushing ¹	G Nock	CB Insert	CB Point ²	RPS Point
	Grains per Inch	Grains	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	O.D. Inches
500	6.5	189	0.500	31½	12	7	21	80/100	9/32
400	7.4	215	0.400	32	12	7	21	80/100	9/32
340	8.2	238	0.340	32 32½	12	7	21	80/100	5/16

Available in: blue, green, orange, purple

INSERTS AND POINTS





G-UNI Bushina



National Archery in the Schools Program

XX75° GENESIS™

- → 7075 aerospace alloy
- → Hard-anodized
- → Guaranteed straightness: ± .005"
- ♦ Weight tolerance: ± 2.5%
- → Strength (psi): 90,000
- → UNI bushing—installed

Genesis is a trademark of Genesis Archery

MADE IN USA

The Ultimate in Precision Speed.

LIGHTSPEED





The ideal spine for leisure and beginner archers, shooting

NEOS™

- → 7075 aerospace alloy
- ◆ Hard-anodized gold
- ♦ Guaranteed straightness: ± .008"
- ♦ Weight tolerance: ± 5%
- ◆ Precision-ground nock swage

INSERTS AND POINTS





SIZES

Sizes: 1618

· Components—sold separately

MADE IN USA

BEGINNER ARCHERY

BEGINNER BOWS

The Easton beginner bow is the perfect set up to get you started shooting archery. Easton has been building archery equipment since 1922, and that experience is built into a high quality recurve bow for long-lasting fun. The bow features a lightweight, slim, polymer technology riser and durable glass-reinforced limbs. At only 1.3 lbs., the Easton recurve is easy to handle and the ideal starter set up for any aspiring archer. With a smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development

and accuracy.

- Ambidextrous design for either right or left-handed archers
- Integrated sight channel
- Custom Dacron string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Available in bow only and kit configurations
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard

Kit colors: Black, Pink, and Camo











ARCHERY COMBO PACK

 Three XX75® size 1816 high strength 28" arrows • High strength 7075 aerospace-grade alloy

· High quality 600D fabric hip quiver

 Holds up to 12 arrows Integrated belt clip

· Comfort-flex finger tab Polymer arm guard

Colors: Black and Pink

• Fits right or left-handed archers

SCOUT 2TM

- Durable fiberglass construction
- Over Nock installed
- Sleeve Point installed

XX75°

- 7075 aerospace alloy
- Guaranteed straightness: ±.005
- Weight tolerance: ±2.5%
- Strength (psi): 90,000
- Size 1816
- Uses one-piece point and conventional nock

BEGINNER FINGER TAB

 Ambidextrous design works well for right and left handed archers











STABILIZERS

CONTOUR™ HUNTER uses our proven Tri-Mod carbon technology to tame

vibration while balancing the bow for better aim and shot execution. The go-to choice for both bowhunters and bowhunter limited class competitors, Contour Hunter is the most advanced stabilizer we've ever developed for the modern bowhunter. Available in Black, Realtree® Max 1, and Realtree® Xtra.

	CONTOUR Hunter				
Size	8 in-21 cm	11 in-28 cm			
Ounces	2.3	2.7			
Grams	65	76			









extension is reinforced with a full-length Internal Stainless Steel Reinforcement Beam. This superstrong beam links the precision internal-bonded ferrules at each end to create a torque-resistant system capable of handling heavy loading, abusive v-bar torquing, and the stress of high-energy bows. The Internal Stainless Steel Beam of Pro-Link Extension has been tested and proven at the highest levels of competition by some of the best archers on the planet. Pro-Link is also the stiffest extension we've ever

made. The precision-made Pro-Link extension is ideally matched to the Easton Contour and Z-Flex system stabilizers, and is fully compatible with most other ATA compliant stabilizer systems with 5/16-24 threads.

	PROLINK Extender							
Size	6 in-15 cm	5 in - 13 cm	4 in - 10 cm					
Ounces	4.64	4.32	4.00					
Grams	131.5	122.5	113.4					





developed for a stabilizer. Featuring aerospace-grade graphite fiber, the Contour CS is optimized for shooters looking for the stiffest possible stabilizer with superior hold and a wind-cheating slim profile for rock-solid aiming. Contour CS—the most advanced stabilizer ever, from the company that pioneered carbon stabilizers—Easton.

	CONTOUR CS Stabilizer							
Size	27 in-69 cm	30 in - 76 cm	33 in - 84 cm					
Ounces	4.0	4.3	4.5					
Grams	115	122	128					










WINDCUTTER 360

CONTOUR[™] Proven performance Contour stabilizer uses a complex carbon fiber construction to damp out post-shot vibration while providing an unmatched aiming experience, even in crosswinds. The Windcutter-360™ design of Contour promotes a steady confidence in crosswinds while the large-diameter base promotes enhanced vibration reduction with no need for rubber decouplers. Choose the super-light, Original Contour for a slightly softer feel on follow-through. Light and efficient, Contour is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari-weights for competitors seeking the most compact setup.

		CONTOUR Tai	CONTOUR Side Rod				
Size 24 in-61 cm 27 in-69 cm 30 in-76 cm		33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm		
Ounces	3.7	4.0	4.3	4.6	2.5	2.7	2.9
Grams	106	114	123	131	71	75	83







WINDCUTTER 360

ZFLEX[™] provides extreme stiffness and high-moment weight system compatibility with minimum aiming float. AVRS™ chamber for rapid vibration amplitude dissipation after the shot. Z-Flex is compatible with 5/16"-24 flat vari-weights.



		Z-FLEX	Z-FLEX Side Rod				
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in - 84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	5.8	6.2	6.5	6.9	3.2	3.5	3.9
Grams	164	175	186	196	92	99	111

- Ultra-stiff design for steady aiming
- AVRS damping for active-shock management
- Lowest mass and highest efficiency

A/C™ PRO
Easton's technologically advanced A/C Pro stabilizers are among the most efficient stabilizers ever developed. Featuring the incredible stiffness of high-modulus carbon fiber and the high-frequency response preferred by top archers across the globe, the Ultra-High Resonance A/C Pro stabilizer is equipped with the proven, low-mass AVRS system. From Olympic and World Championship podiums to the top of the local league leader board, A/C Pro is proven across the globe. A/C Pro is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari weights.



		A/C PRO Stabiliz		A/C PRO Side Rod		
Size	24 in-61 cm	29 in-74 cm	34 in-86 cm	9 in-23 cm	10 in-25 cm	11 in-28 cm
Ounces	4.3	5.0	6.0	1.7	1.8	1.9
Grams	122	142	170	48	51	54

- Proven A/C Construction
- AVRS Damping System for Shock Management
- Stiff Design for Steady Aiming

@EASTON

Both Contour and Z Flex Stabilizers come with a reusable protective sleeve

27

MOUNTS

FIXED V-BAR WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt included



ADJUSTABLE V-BAR WITH BOLT

- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt included



ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel eve bolt included

CONTOUR AND Z-FLEX CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- · Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down





- Stainless steel
- 7075 all0y
- Precision design
- Zero + 10° Drop models available



VARI-WEIGHTS











FLAT VARI-WEIGHTS 5/16-24 THREAD*





ORIGINAL VARI-WEIGHTS 1/4 -20 THREAD

				VullCC3	Viaili.
	•	_	Contour Base	2.0	57
	Ounces	Grams	Z Flex Base	2.0	57
Module	1.5	43	1 0z.	1.0	28.5
1/2 Module	0.75v	21		1.0	20.3
	1.5		2 Oz.	2.0	5/
Сар	1.5	43	4 Oz.	4.0	114

- Infinite adjustability



QUICKBOND™ INSERT **ADHESIVE**

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz. and 1.0 FL oz.



QUICKBOND™ VANE **ADHESIVE**

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz. and 1.0 FL oz.



FASTSET™ VANE GEL

Sizes: 3 gram and 9 gram



24-HOUR INSERT EPOXY SYRINGE

- Provides a permanent bond
- Flexible, non-brittle formula



DR. DOUG'S™ 3-STEP **BOWSTRING MAINTENANCE KIT**

- String Cleaner —removes dirt, wax & contaminants
- Bowstring Revitalizer—restores color & penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax—protects longer & better than conventional waxes



In the spirit of the man who shaped modern archery. Doug Easton's legacy of innovative genius continues today in the full line of "Dr. Doug's" products.

QUICKBOND™ ARROW BUILDING & REPAIR KIT

- Complete vane and insert adhesive kit enough for a dozen arrows.
- Orange Quickbond Insert Glue
- Clear Quickbond Vane Adhesive
- Red VC-3 Threadlocker
- Low Temperature Hot-melt Stick



CONVENTIONAL **BOWSTRING WAX**

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick



VC3® THREAD LOCKER

- Unique reusable formula.
- Apply to broadheads, practice points, & bow accessories for solid mounting and reduced vibration.

VC-3 is a registered trademark of ND Industries, Inc.



QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



Fletch-Tite® is a registered trademark of Bohning Company LTD



DR. DOUG'S TOOLS & SUPPLIES

(A) DR. DOUG'S™ FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula makes for easy arrow extraction
- · Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included

(B) ARROW PULLER WEDGE

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit

(C) ARROW PULLER PUCK

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage

(D) PRO HEX FOLD UP SET - STD

• Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050

(E) PRO HEX FOLD UP SET - XL

• XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64

(F) PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16,
- Metric: 1.5, 2.5, 3.0, and 2.8 flat blade

(G) PRO HEX STUBBY 10 PCS. SHORT L SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4

(H) PRO HEX LIMB MASTER **ALLEN WRENCHES**

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually in sizes: 7/32, 3/16, 1/4

(I) PRO ARCHERY NEEDLE NOSE PLIERS

A must for any serious bow mechanic

(J) ELITE NOCK AND D-LOOP PLIERS

- Convenient and versatile archery tool
- Patent-pending dual-jaw design
- Maximizes mechanical advantage for tightest possible D-loops
- Six tools in one

(K) UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks

(L) BROADHEAD WRENCH

For safe installation & removal of broadheads from arrows









(M) PRO SHOP TOWELS

Durable and disposable lint-free towel especially suited for preparing arrow shafts for fletching and point installation

(N) BOW STRINGER

Molded rubber-cupped stringer for easy and recommended stringing of target recurve bow

(O) BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep-
- Includes 1m red thread & 1m black thread

(P) BCY POLYGRIP CENTER **SERVING THREAD**

- .020" polyester thread perfect for center serving
- 75 yard spool

(Q) BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- 1m length

BCY is a trademark of BCY Bowstring.

(R) T-BOW SQUARE & L-BOW SQUARE

- · Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up

(S) 9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from G to Max 27 diameters

ARCHERY ESSENTIALS 12-PIECE PRO SHOP TOOL KIT (T), 8-PIECE VALUE PACK (U), **AND 6-PIECE CROSSBOW ESSENTIALS KIT (V)**

 Kit items save 30% versus items sold separately. Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors. 12-Piece Kit Adds:

12 and 8 Piece Kits Include:

- Extra Large Folding Allen Wrench Set
- Nock Installation & Removal Tool
- Wedge Arrow Puller
- Zippered Case Cube
- Bowstring Wax
- Serving Thread
- D-Loop Rope
- Broadhead Wrench

- D-Loop Pliers Bow Square- L Model
- Small Folding Allen Wrench Set
- Arrow Prep Tool Kit

6-Piece Crossbow Kit includes:

- Small Folding Allen Wrench Set
- Zippered Cube Case Rail Lube Wax
- Wedge Arrow Puller
- Broadhead Wrench
- Scope Lens Cleaner Cloth

(K)

BTV™ CROSSBOW VANES

- Height and profile designed specifically for high-powered crossbows Stiffening ridge cuts flutter at high speeds


• Increases accuracy and tightens broadhead groups




All weights are within ± 0.5 grain.

Diamond Vanes®



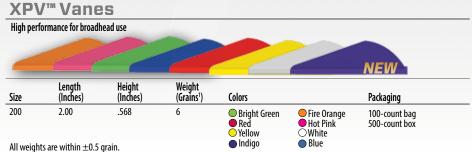


Tite Flight™ Vanes

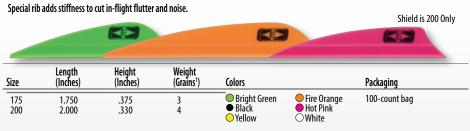


All weights are within ± 0.5 grain.

FEATHERS

32

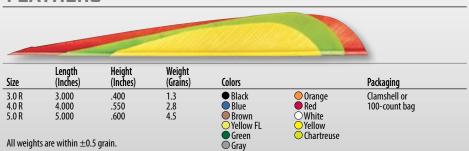

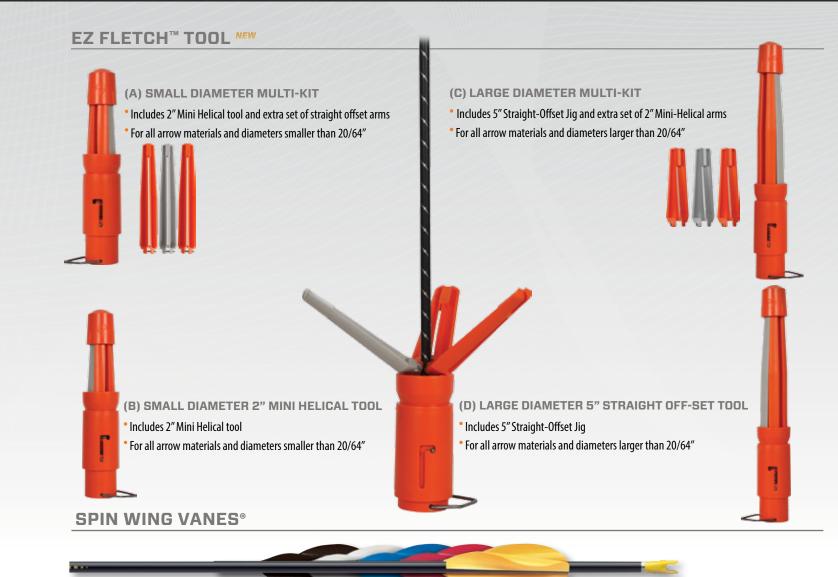



Colors ● Black ○ White ● Blue ● Red ○ Yellow

1.75-inch vanes in black, white, blue, red, and yellow Available in right or left

DIAMOND™ SHRINK CRESTS

Packaging - 50-count bag

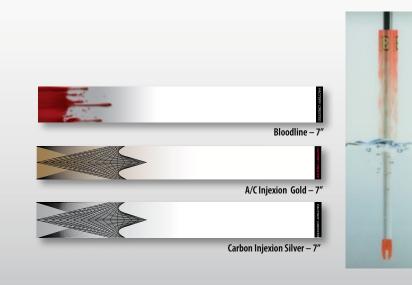

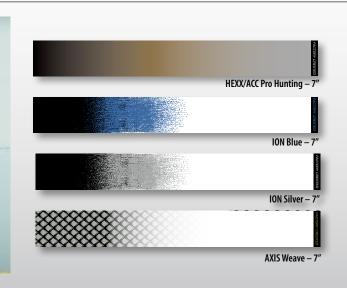

Spin Wing Vane® is a registered trademark of Range-O-Matic Archery Company

ELITE FIELD QUIVER NEW

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release cobra™ style buckle for secure operation and positive engagement.
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Quiver Belt Included. Release Pouch Sold Separately.
- · Colors*: Red, Blue, Grey, White, and Carbon Black





ELITE QUIVER BELT NEW

- Sizes: One size fits most
- Innovative Hook & Loop Adjustment
- Quick-release cobra™ style buckle



ELITE RELEASE POUCH NEW

Sizes: One size fits most



ELITE HIP QUIVER NEW

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release cobra™ style buckle for secure operation and positive engagement.
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes

1

- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Quiver Belt Included. Release Pouch Sold Separately.
- Colors*: Red, Blue, Grey, White, and Carbon Black





MODULAR SYSTEM CAN ACCOMMODATE

MULTIPLE CONFIGURATIONS:



DELUXE QUIVER BELT NEW

- Sizes: One size fits most
- Innovative Hook & Loop Adjustment

DELUXE FIELD QUIVER NEW

• Semi-rigid rear-facing compression-molded arrow body eliminates

Fleece-lined interior and removable arrow dividers for quiet and

Integrated bow-square slot and dual accessory attachment rings

Colors*: Silver, Green, Red, Blue, Pink, Purple, and Realtree™ Xtra

High-denier woven fabric construction

the need for separate arrow tubes

Release Pouch and Belt Sold Separately

customized arrow management

Easy On/Off T-Buckle Connection



DELUXE RELEASE POUCH

• Sizes: One size fits most




DELUXE HIP QUIVER NEW

- · High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Attached upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory attachment rings
- Release Pouch and Belt Sold Separately
- Colors*: Silver, Green, Red, Blue, Pink, Purple, and Realtree™ Xtra









FLIPSIDE™ 4-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop upper and lower pockets for wear on right or left side
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra®





FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra®









FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
 —for wear on either side
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra®



REPLACEMENT FLIPSIDE ARROW TUBE





RANGE LITE™ HIP QUIVER

- Lightweight design
- Molded shank and arrow separator
- Easy-access pockets
- Top pocket for releases, pens or smart phones
- Available in right or left hand configurations
- Internal pocket dividers
- Colors: Silver, Red, Blue, Pink, and Realtree Xtra®



BOW CASES **BOW** CASES

GENESIS® 4014 BOW CASE

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Pink, Blue, Black and Lost® Camo











MICRO FLATLINE™ 3617 BOW CASE

- Modern designed bowcase for maximum protection and space saving compact size
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy grab pulls
- Fits most bows; interior dimensions of 35" x 16"
- Exterior mesh accessory pocket
- Colors: Black, Pink, Realtree Xtra® Realtree Max-1™, and Lost® Camo













- Sleeve-style bow case for maximum protection and space saving compact size.
- Compatible with all Easton arrow tote and arrow case models.
- Premium oversized #10 zippers with easy grab pulls
- Fits most bows and arrow cases; interior dimensions of 43" x 16"
- Two exterior and one interior accessory pockets for release aids, range finders, tools or other archery essentials
- Colors: Black, Realtree Xtra® Realtree Max 1™, and Lost® Camo











DELUXE 4517 BOW CASE & 4517 LADIES BOWCASE

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear.
- Compatible with all Easton arrow tote and arrow case models.
- Premium oversized #10 zippers with easy-grab pulls
- Cavernous 3.5" case-cube compatible fleece-lined padded interior (Case Cubes sold separately)
- Fits most bows —interior dimensions 44" x 16"
- 360° padding for complete bow protection
- Movable bow-anchoring straps for rock-solid bow security
- Elastic arm band with adjustable cord locks
- Colors: Black, Realtree Xtra®, Realtree Max-1®, Lost® Camo, Realtree Max-1®/Lavender





























YKK® is a registered trademark of YKK® Corporation

DELUXE 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Compatible with the Easton Deluxe Crossbow Arrow Case
- Case-cube compatible interior fleece hook and loop lining with adjustable bow attachment straps
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection.
- Compatible with both standard and reverse limb crossbows
- Includes one Corner Case Cube pocket
- Inside dimensions 41" x 26"

DELUXE 3915 & 3615 COMPOUND/ RECURVE ROLLER BOW CASE

- Advanced wheeled compact travel case for compound/recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Available in two sizes (36"Lx15"Wx9"H) and (39"Lx15"Wx9"H)
- Compatible with the Easton Deluxe 33" & 36" Arrow Cases
- Case Cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Airline Travel Cover recommended (sold separately)

ELITE™ 4717 DOUBLE BOW CASE

- Two full-size target bow compatible
- Inside dimensions 46"x16"
- Case-cube compatible double fleece twin main compartment.
- Double or single bow with opposite side clothing storage.
- Dense EVA foam 360° exterior padding
- Re-positionable Velcro bow anchor system
- Six interior and exterior accessory pockets
- Compatible with Easton Arrow Tote
- The best YKK® reverse coil double zipper pulls
- Shoulder strap included
- Available in Pro Tour black/grey/orange

ELITE 4716 & 4416 DOUBLE ROLLER BOW CASE

- Two full-size target bow compatible
- Triple field-replaceable roller bearing wheels.
- Available in two sizes (47"Lx16"Wx10"H) and (44"Lx16"Wx10"H) outside dimensions.
- Double-walled protection composite armor shield + foam 360° exterior padding.
- Case-cube compatible double fleece main compartment.
- Double seatbelt system to securely anchor bows
- Padded internal divider blanket for layered storage.
- Five interior accessory pockets, adjustable padded walls.
- Three expanding outside luggage compartments
- Four exterior accessory pockets
- The best YKK® reverse coil double zipper pulls.
- Compatible with Easton Arrow Tote
- Airline Travel Cover recommended (sold separately)
- Available in Pro Tour black/grey/orange

TEAM SERIES PACKS RECURVE PACKS

ELITE™ RECURVE BACKPACK

- 6061-T6 aluminum internal frame suspension for easy carrying of heavy loads
- Fits up to 27" recurve handles and long limbs
- Collapsible stabilizer sleeve & arrow tote
- External, cinch-able tripod pocket
- Privacy mesh pocket for business cards
- High-denier nylon construction
- Cinch straps for total load security
- Arrow tote included
- Universal rain cover (included)



DELUXE RECURVE PACK NEW

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories.
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items.
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included



CLUB XT™ RECURVE PACK

- Affordable recurve backpack with a modern sophisticated design
- High-denier ballistic POLY fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: Grey, Blue, Red, Black



10-RING TEAM-COLOR PACK

- 1700 cubic inch/27 liter
- Bellowed front pocket
- Twin stretch hydration pockets
- YKK® zippers
- Hydration System compatibility
- Nylon 420D construction
- Colors: All Shown





720 TEAM-COLOR PACK

- Hydration System compatibility
- Durable Nylon 420D construction
- YKK® quality zippers
- Packs into itself for easy transport
- Integrated seat pad
- 1100 cubic inches, 18 liter capacity
- · Colors: All Shown

ACCESSORIES BOWCASE ACCESSORIES

CASE CUBES BOW CASE **ACCESSORY POCKETS**

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



7.5" X 15"

ROLLER BOWCASE TRAVEL COVERS

- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot



BOW SLEEVE

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all bowcases



STABILIZER SYSTEM SLEEVE

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all bowcases





DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely(with or without points)
- Four sizes:

Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3") Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3") Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3") Round Arrow Tote (12-arrow) - adjustable length

DELUXE ARM GUARDS NEW

Progressive designs molded from durable, polycarbonate material.

- Durable elastic straps ensure a snug fit
- Available in oval and bone configurations
- · Colors: Blue, Yellow, Red, Smoke









COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: Black



STIFF SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange











CHEST PROTECTOR Unique comfort-fit design

- Breathable air-mesh construction
- · Easy-adjust shoulder
- Sizes: Right and left-handed models XS, S, M, L, XL and XXL
- · Colors: Black and White



DELUXE PARACORD DIAMOND SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange









DELUXE NEOPRENE WRIST SLINGS

- Durable, lightweight neoprene construction
- Easy-adjust strap
- Designs: Diamond Plate, Elk, Arrow and Whitetail





EASTON TEAM JERSEY

- Lightweight fabric
- Women: XS-XL
- Men: S-4XL



PRO TOUR™ JACKET **AND VEST**

- Soft-shell tech fabric
- Micro fleece lining
- Sizes: S-XXL





- Layer under shooter jerseys or hunting clothing
- Wicks moisture
- Sizes: S-XXL







TOWEL



PRO TOUR™ **SUNGLASSES**







SHOOTER HAT NEW • Sizes: S/M, L/XL





POINTS



Bullet Point - Nickel-plated Hardened Steel

- Fits aluminum shafts, Fatboy
- 80 and 100 grains
- Packaging Dozen Pack



CB™ Point - Nickel-plated Hardened Steel

- Fits Lightspeed Models
- 80 and 100 grains Packaging – Dozen Pack

NIBB Point - Nickel-plated Hardened Steel and Precision Alloy Tube

- Fits Aluminum shafts, A/C/C and Carbon One arrows
- Packaging Dozen Pack



A/C/C™ One-Piece Parabolic Point — Nickel-plated Hardened Steel

- Fits A/C/C and Carbon One Arrows
- 80 and 100 grains
- Packaging Dozen Pack



One-Piece & Apollo Point-Nickel-plated Hardened Steel

- Fits A/C/E, A/C/C, A/C/G, Carbon One
- and Apollo (810-1150) models • 50 / 75 / 100 grains
- Packaging Dozen Pack



HP™ Point

- Point weight 80 and 100 grains
- Packaging Dozen Pack



Full Bore™ One-Piece Point

- · Hardened Steel
- 100 / 150 / 200 /250 grains
- Packaging Dozen Pack



Genesis One-Piece Point

NASP Standard

BREAK-OFF POINTS




X10® Ballistic Tungsten Break-Off

- Fits X10 and ProTour • 100 to 120 grains
- Packaging Dozen Pack

X10® Stainless Steel Break-Off

- Fits X10 and ProTour
- 80 to 120 and 100 to 120 grains
- Packaging Dozen Pack



A/C/E® Stainless Steel Break-Off

- Fits A/C/E, A/C/G (610-1500) and Pro Field
- Three Models 60 to 80, 80 to 100 and 100 to 120 grains
- Packaging Dozen Pack



A/C/G™ Stainless Steel Break-Off

- Fits A/C/G (540-430)
- 100 to 120 grains
- Packaging Dozen Pack

Carbon One™ Stainless Steel Break-Off

- Fits Carbon One (600-1150)
- Three Models 70 to 90, 90 to 110 and 100 to 120 grains
- Packaging Dozen Pack

SCREW-IN POINTS



RPS - Nickel-plated Hardened Steel

17/64" - 50 / 60 / 70 / 80 / 90 / 100 / 110 / 125 grains 9/32" - 50 / 60 / 70 / 80 / 90 / 100 / 110 / 125 grains

• Packaging - Dozen Pack



A/C/E® 5-44 - Nickel Plated Hardened Steel

- Fits A/C/E and A/C/G (610-1500)
- 31 / 36 / 41 / 46 / 51 grains
- Packaging Dozen Pack



8-32 Multi Point

17/64" - 75 / 85 / 100 gr. 9/32" - 75 / 85 / 100 gr. 5/16" - 85 / 100 / 125 gr. 11/32" - 85 / 100 / 125 gr.

• Packaging - Dozen Pack or 1000 Count Box

INSERTS



- A/C/E®, A/C/G™ and Pro Field 5-44 Screw-in Insert Nickel-plated
- Hardened steel and precision alloy tube • Fits all A/C/E, A/C/G (610-1500), Pro Field and Apollo
- 39 / 49 / 59 grains
- Packaging Dozen Pack



Half-out RPS Insert - Precision Alloy Hard

- Fits A/C/C (3L-18 to 3-39) arrows
- Packaging Dozen Pack



RPS Insert

- Fits aluminum arrows, A/C/C (3-49 to 3-71)
- Packaging Dozen Pack or 1000 Count Box



CB Insert

- Fits Lightspeed models
- Packaging Dozen Pack

UNI BUSHINGS



G-UNI Bushings® - Precision Alloy

- Fits aluminum arrows
- Fits A/C/C, LightSpeed, Platinum (1914 and smaller), Fatboy and FullBore arrows (see charts on select model pages)
- Packaging Dozen Pack



Super-UNI Bushing® - Precision Alloy

- Fits aluminum arrows
- Fits Fatboy and FullBore arrows (see charts on select model pages)
- Packaging Dozen Pack

PINS



X10[®] Pin 7075 - Alloy

- Fits X10 and ProTour Arrows (670-770)
- Packaging Dozen Pack



- ProTour™ Pin 7075 Alloy (Only™ ProField 620) • Fits X10 ProTour Arrows (380-620)
- Packaging Dozen Pack

A/C/E[®] Pin 7075 - Alloy

- Fits All A/C/E, A/C/G, Pro Field (610-1500), Carbon One (810-1150) and Apollo (1200-1070)
- Packaging Dozen Pack



A/C/G™ Pin 7075 - Alloy

- Fits All A/C/G (540-430) and Pro Field (380-570)
- Packaging Dozen Pack



Carbon One™ #1 Pin 7075 - Alloy

- Fits Carbon One (550-730) and Apollo (740-950)
- Packaging Dozen Pack



Carbon One™ #2 Pin 7075 - Alloy

- Fits Carbon One (500-410) and Apollo (560-670)
- Packaging Dozen Pack

PIN NOCKS



Pin Nock™ Polycarbonate Press-fit Indexable

- · Large or small sizes available
- Fits all nock pins, see arrow models for fitment
- Colors: green, red, blue, orange, lemon lime, and crystal



G Pin Nock™ Polycarbonate Press-fit Indexable

- Fits all nock pins, see arrow models for fitment
- Colors: green, red, blue, orange, and lemon lime, and crystal
- Packaging Dozen Pack

NOCKS



N Nock™- Precision-molded, Press-fit

- Fits Genesis
- Colors: red, white, green and yellow
- Packaging Dozen Pack or 100-count Bulk



G Nock™ - Precision-molded, Press-fit

- Large (098) or small (088)
- Fits UNI Bushing
- See arrow models for compatibility • Colors: black, white, green, orange, red, blue and deep red
- Packaging Dozen Pack or 100-count Bulk



MicroLite™ Super Nock® - Polycarbonate, Press-fit

- Fits FullBore and Fatboy aluminum shafts with Super UNI Bushings
- Colors: red, green, yellow, red and smoke
- Packaging Dozen Pack or 100-count Bulk



Super Nock® and S Nock™ - Polymer Alloy, Press-fit

- Fits FullBore and Fatboy aluminum shafts with
- Super UNI Bushings
- Colors: orange, green, yellow, black and white Packaging – Dozen Pack or 100-count Bulk



Deep Six Nock™ - Polycarbonate, Press-fit

TRANSPARENT

Smoke

Crystal

- Colors: blue and red
- Packaging Dozen Pack or 100-count Bulk

X10® Overnock - Polymer Alloy, Press-fit

- Fits X10, see arrow models for fitment
- Colors: orange, yellow and green
- Packaging Dozen Pack



H Nock™ - Polycarbonate, Press-fit

- Fits H Diameter Carbon Shafts
- · Colors: black, white, blue, yellow, green,
- orange, deep red and pink • Packaging - Dozen Pack



Conventional Nock for Swaged Shafts

- Fits swaged aluminum arrows
- · Colors: black, green, orange, white, blue, red, and teal
- Packaging Dozen Pack or 100-count Bulk



3D Super Nock® - Polycarbonate, Press-fit

- Fits FullBore and Fatboy aluminum shafts with
- Super UNI Bushings • Colors: black, green, orange and white
- Packaging Dozen Pack or 100-count Bulk

NOCK COLORS

White








































Using the Target Arrow Selection Chart


- 1. Once you have determined your Correct Target Arrow Length and Calculated or Actual Peak Bow Weight, you are ready to select your correct shaft size:
- 1.A Compound bows. In the "Calculated Peak Bow Weight" column (left-hand side of the chart), select the column with the type of cam on your bow. Locate your Calculated **Peak Bow Weight** in that column.
- 1.B **Recurve bows and Modern Longbows.** In the "Recurve Bow Weight" column (right-hand side of the chart), select the column with the bow type. Next, locate your Actual Peak Bow Weight in that column.
- 2. Move across that bow-weight row horizontally to the column indicating your Correct Arrow Length. Note the letter in the box where your *Calculated or Actual Peak Bow* Weight row and Correct Target Arrow Length column intersect. The "Shaft Size" box below the chart with the same letter contains your recommended shaft sizes. Select a shaft from the chart depending on the shaft material, shaft weight, and type of shooting you will be doing.

Selecting the Correct Target Shaft Size


Our Target Shaft Selection Chart will help you find the perfect shaft match for your bow—quickly and easily. Advanced, interactive Spine Weight Comparison and Target Shaft Selection Charts are now available online at

1. Determining Correct Target Arrow Length

The *Correct Arrow Length* for bows (including bows with overdraws) is determined by drawing an extra-long arrow to full draw and having someone mark the arrow one inch in front of where the arrow contacts the most forward portion of the arrow rest.

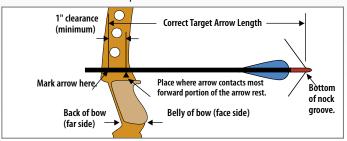

Bow Draw Length. Draw length is measured at full draw from the bottom of the nock groove to the back (far side) of the bow. Actual arrow length and draw length are only the same if the end of the arrow shaft is even with the back of the bow (far side) at full draw.

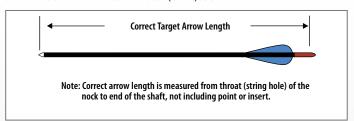

2. Determining Actual Peak Bow Weight **Compound Bows**

Compound bows must be measured at the peak bow weight as the bow is being drawn and not while letting the bow down.

The suggested shaft sizes in the charts were determined using a "Standard" Setup which includes:

- Use of a release aid
- Compound bow with brace height greater than 61/2"

If your setup differs from the "Standard" Setup, use the Variables (following) to make adjustments to determine the *Calculated Peak Bow Weight* so the correct arrow size can be selected on the chart.

Variables to the "Standard" Setup for Compound Bows

- Point weight over 100 grains—Add 3 lbs. for each 25 grains heavier than 100 grains.
- Bows with brace heights less than 61/2"-Add 5 lbs.
- Finger release—Add 5 lbs.

				Arrow l oundag			
21"	22"	23"	24"	25"	26"	27"	RECURVE BOW Bow Weight—lbs. Finger Release
		Y 1	Y 1	Y2	Y 3	Y4	16–20 lbs. (7.3–9.1 kg)
	Y 1	Y 1	Y2	Υ3	Y4	Y5	20–24 lbs. (9.1–10.9 kg)
Y1	Y 1	Y2	Υ3	Y4	Y5	Y6	24–28 lbs. (10.9–12.7 kg)
Y1	Y2	Y 3	Y4	Y5	Y6	Y7	28–32 lbs. (12.7–14.5 kg)
Y2	Y 3	Y4	Y5	Y6	Y7		32–36 lbs. (14.5–16.3 kg)
Y3	Y4	Y5	Y6	Y7			36–40 lbs. (16.3–18.1 kg)

Note: If your arrow shaft is longer than inch length shown, round-up to the next longer increment.

Size	Spine	Model	Weight Grs/Inch	Size	Spine	Model	Weight Grs/Inch
	Gre	oup Y1			Gr	oup Y2	
1214	2.501	75	5.9	1413	2.036	75	5.9
	Gro	oup Y3			Gr	oup Y4	
1400 1416	1.400 1.684	Inspire 75	6.7 7.2	1500 2-00 1400 1416	1.500 1.500 1.400 1.684	A/C/G A/C/C Inspire 75	4.7 4.7 6.7 7.2
	Gre	oup Y5			Gr	oup Y6	
1250 1300 3L-00 1200 1200 1514 1516	1.250 1.300 1.300 1.200 1.200 1.379 1.403	A/C/E A/C/G A/C/C Apollo Inspire X7 75	5.1 5.1 5.5 7.2 6.8 7.3	1250 1150 3-00 1150 1200 1200 1516 1614	1.250 1.150 1.150 1.150 1.200 1.200 1.403 1.153	A/C/E A/C/G A/C/C Carb1 Apollo Inspire 75 X7	5.1 5.5 5.5 5.0 5.5 7.2 7.3 7.7
	Gre	oup Y7				Key	
1000 1100 1000 1000 3-00 1000 1070 1000 1614 1616	1.000 1.100 1.000 1.000 1.150 1.000 1.070 1.000 1.153 1.079	A/C/E A/C/E X10 A/C/G A/C/C Carb1 Apollo Inspire X7 75	5.7 5.1 5.3 5.7 5.5 5.0 5.9 7.2 7.7 8.4	A/C/E X10 A/C/G A/C/C Carb1 Apollo Inspire X7 75	X10 Shafts (AA/C/G (Alum Aluminum/C Carbon One Carbon Apol Carbon Inspi X7 Eclipse (7	re 178 alloy) um Plus,Tribut	bon) site on
			haft length, m sert, or UNI Bu		grains-per-in	ch (gpi) by you	ır actual shaft

Overdraw Compound Bows

If you are using an overdraw, make the variable calculations (if any), and then modify the Calculated Peak Bow Weight of your bow using the chart below.

Length of Overdraw	1″	2"	3"	4"	5"	
For 50#-70# Actual/Calculated Peak Row Weight, add to how weight -	1#	3#	6#	9#	12#	

3. Determining Actual Peak Bow Weight Recurve and Modern Longbows

Your local archery pro shop is the best place to determine the actual draw weight of your bow. Actual Peak Bow Weight for recurve bows and longbows should be measured at your draw length.

OMPOUND BOW – R	elease Aid Calculated Pe	ak Bow Weight–lbs.			(Correct	Arrow	/ Leng	th for	Target	• Field	1 • 3D	
ATA Bow Rating up to 275 FPS	ATA Bow Rating 276—300 FPS	ATA Bow Rating 301–340 FPS	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	RECURVE BOW Bow Weight—lbs. Finger Release
29–35 lbs. (13.2–15.9 kg)			00	01	02	03	T1	T2	T3				21–27 lbs. (9.5–12.2 kg)
35–40 lbs. (15.9–18.1 kg)	29–35 lbs. (13.2–15.9 kg)		01	02	03	T1	T2	T3	T4	T5			27–32lbs. (12.2–14.5 kg)
40–45 lbs. (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)	29–35 lbs. (13.2–15.9 kg)	02	03	T1	T2	T3	T4	T5	T6	T7		32–36 lbs. (14.5–16.3 kg)
45–50 lbs. (20.4–22.7 kg)	40–45 lbs. (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)	03	T1	T2	T3	T4	T5	T6	T7	T8	Т9	36–40 lbs. (16.3–18.1 kg)
50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	40–45 lbs. (18.1–20.4 kg)	T1	T2	T3	T 4	T5	T6	T7	T8	T9	T10	40–44 lbs. (18.1–20.0 kg)
55–60 lbs. (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	T2	T3	T4	T5	T6	T 7	T8	T9	T10	T11	44–48 lbs. (20.0–21.8 kg)
60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	Т3	T4	T 5	T6	T7	T8	T9	T10	T11	T12	48–52 lbs. (21.8–23.6 kg)
65–70 lbs. (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	T4	T5	T6	T7	T8	Т9	T10	T11	T12	T13	53–57 lbs. (24.0–25.9 kg)
70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	T5	T6	T7	T8	T9	T10	T11	T12	T13	T13	58–62 lbs. (26.3–28.1 kg)
76–82 lbs. (34.5–37.2 kg)	70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	T6	T 7	T8	T9	T10	T11	T12	T13	T13	T14	63–67 lbs. (28.6–30.4 kg)
82–88 lbs. (37.2–39.9 kg)	76–82 lbs. (34.5–37.2 kg)	70–76 lbs. (31.8–34.5 kg)	T 7	T8	T9	T10	T11	T12	T13	T13	T14		68–73 lbs. (30.8–33.1 kg)

For ATA Speed of 341-350 FPS:

Start in 301-340 FPS column, drop down one row in chart.

62lb—31in—345 FPS: drop down one row, still in Group T13 52lb—28in—345 FPS: drop down one row, shift from Group T8 to Group T9

For ATA Speed of 351+ FPS:

Start in 301-340 FPS column, drop down two rows in chart

62lb—31in—355 FPS: drop down two rows, shift from Group T13 to Group T14 52lb—28in—355 FPS: drops down two rows, shift from Group T8 to Group T10

Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/Inch	Size	Spine	Model	Weight Grs/Inch
		up 00				up 01			Grou				Grou		
1214 1413	2.501 2.036	75 75	5.9 5.9	2-00 1500	1.500 1.500	A/C/G A/C/G	4.7 4.7	1250 1300	1.250 1.300	A/C/E A/C/G	5.1 5.1	1100 1150	1.100 1.150	A/C/E A/C/G	5.1 5.5
1413	2.030	/3	3.9	1416	1.684	75 75	7.1 7.3	3L-00	1.300	A/C/C	5.1	3-00	1.150	A/C/G	5.5
				1516	1.403	75	7.3	1400 1514	1.400	Inspire X7	6.7	1200	1.200	Inspire	5.5 7.2 5.5
								1514	1.379	λ/	6.8	1200 1614	1.200 1.153	Apollo X7	5.5 6.8
	Gro	up T1			Gro	up T2			Grou	n T3			Grou	n T4	
*920•1000R	0.920•1.000		5.8	*780•850R	0.780•0.850	A/C/E	6.0	*720•780		A/C/E	6.4	*670•720R	0.670•0.720	A/C/E	5.9
*900•1000R	0.900•1.000	X10	5.8	*750•830R	0.750•0.830	X10	6.4	*700•750		X10	6.7	*650•700R	0.650•0.700	X10	6.8
*880•1000R	0.880•1.000	A/C/G	5.9	770	0.770	ProTour	6.0	720	0.720	ProTour	6.2	670	0.670	ProTour	6.5
2L-04	1.020	A/C/C	6.1	*810•880R	0.810•0.880	A/C/G	6.1	*710•810		A/C/G	6.5	*660•710R	0.660•0.710	A/C/G	6.9
2-04	0.920	A/C/C	6.5 5.3	2-04	0.920	A/C/C	6.5 5.8	3X-04	0.830	A/C/C	6.7 7.0	3L-04	0.750	A/C/C	7.0 7.2
900 1070	0.900 1.070	Carb1 Apollo	5.9	810 950	0.810 0.950	Carb1 Apollo	6.2	3L-04 730	0.750 0.730	A/C/C Carb1	6.0	3-04 660	0.680 0.660	A/C/C Carb1	6.6
1000	1.000	Inspire	7.2	900	0.900	Inspire	7.7	750 750	0.750	Inspire	8.1	630	0.630	Inspire	7.9
1713	1.044	75	7.4	1714	0.963	X7	8.1	840	0.840	Apollo	6.5	740	0.740	Apollo	7.2
1714	0.963	X7	8.1	1716	0.880	75	9.0	1813	0.874	75	7.9	1913	0.733	75	8.3
1616	1.079	75	8.4					1814	0.799	X7	8.6	1914	0.658	Х7	9.3
								1816	0.756	75	9.3				
		up T5		ļ		up T6			Grou				Grou		
*620•670R *600•650R	0.620•0.670 0.600•0.650	A/C/E X10	6.1 7.0	*570•620R *550•600R	0.570•0.620 0.550•0.600	A/C/E X10	6.3 7.5	*520•570R *500•550R	0.520 • 0.570 0.500 • 0.550	A/C/E X10	6.7 7.8	*470•520R *450•500R	0.470•0.520 0.450•0.500	A/C/E X10	6.8 8.1
620	0.620	ProTour	6.7	570	0.570	ProTour	6.9	520	0.520	ProTour	7.3	470	0.470	ProTour	7.6
*610•660R 3-04	0.610•0.660 0.680	A/C/G A/C/C	7.3 7.2	*540•610R 3L-18	0.540•0.610 0.620	A/C/G A/C/C	7.7 7.5	*540•610R 3-18	0.540 • 0.610 0.560	A/C/G A/C/C	7.7 7.8	*480•540R 3-28	0.480•0.540 0.500	A/C/G A/C/C	8.4 8.1
660	0.660	Carb1	6.6	600	0.600	Carb1	6.9	3-18	0.500	A/C/C	8.1	3-39	0.440	A/C/C	8.6
630	0.630	Inspire	7.9	570	0.570	Inspire	8.2	550	0.550	Carb1	6.9	500	0.500	Carb1	7.4
670 2013	0.670 0.610	Apollo 75	7.7 9.0	610 500	0.610 0.500	Apollo LSpd	8.1 6.5	560 500	0.560 0.500	Apollo LSpd	8.4 6.5	500 500	0.500 0.500	LSpd Triumpl	6.5
1914	0.658	X7	9.3	500	0.500	FB [']	7.1	500	0.500	Triumph		500	0.500	FB	7.1
1916	0.623	75	10.0	2013 2014	0.610 0.579	75 y7	9.0 9.6	500 2212	0.500 0.505	FB X7	7.1 8.8	2212 2213	0.505 0.460	X7 X7.75	8.8 9.9
				1916	0.623	X7 75	10.1	2114	0.510	X7, 75	9.9	2114	0.510	X7, 75	9.9
	Const	- ТО			Const	T10		2016	0.531	75	10.6		C		
*420.4700	0.430•0.470	up T9	7.0	*400 420D		ip T10	7.5	*270 400D	Group		7.0	2700	Grou		7.0
*430•470R *410•450R	0.410 • 0.450	A/C/E X10	7.0 8.5	*400•430R *380•410R	0.400•0.430 0.380•0.410	A/C/E X10	7.5 8.9	*370•400R 380R	0.370 • 0.400 0.380	A/C/E X10	7.9 8.9	370R 350R	0.370 0.350	A/C/E X10	7.9 8.4
420	0.420	ProTour	8.0	380	0.380	ProTour	8.4	380	0.380	ProTour	8.4	3-60	0.340	A/C/C	9.5
*430•480R 3-39	0.430•0.480 0.440	A/C/G A/C/C	8.9 8.6	*430•480R 3-39	0.430•0.480 0.440	A/C/G A/C/C	8.9 8.6	3-49 3-60	0.390 0.340	A/C/C A/C/C	8.8 9.5	3-71 340	0.300 0.340	A/C/C LSpd	9.9 8.2
450	0.450	Carb1	8.1	3-49	0.390	A/C/C	8.8	400	0.400	LSpd	7.4	340	0.340	FB [']	8.3
400 450	0.400 0.450	LSpd Triumph	7.4	410 400	0.410 0.400	Carb1 LSpd	8.5 7.4	400 350	0.400 0.350	FB Triumph	7.8	350 290	0.350 0.290	Triumph SDRIVE	7.8
400	0.400	FB	7.8	450	0.450	Triumph	7.4	290	0.290	SDRIVE	7.8	350	0.350	X7	8.4
2311	0.450	X7	8.9	400	0.400	FB .	7.8	350	0.350	FBORE	8.4	2511	0.348	Х7	9.6
2312 2213	0.423 0.460	X7 X7. 75	9.5 9.9	2413 2214	0.365 0.425	X7, 75 X7	10.5 10.4	2413 2314	0.365 0.390	X7, 75 X7, 75	10.5 10.8	2512 2612	0.321 0.285	X7 X7	10.3 10.7
2214	0.425	X7	10.4	2314	0.390	X7, 75	10.8	2315	0.340	X7, 75	11.8	2613	0.265	X7	11.5
2115	0.461	75	10.8	2412	0.400	Х7	9.7	2511	0.348	Х7	9.6	2712	0.260	Х7	11.3
	Grou	p T13			Grou	ıp T14		A/C/E	Aluminum /Carb /F:-	rtra na a		D TL.	siza rasamma J-	stions for	sum o bours
325R	0.325	X10	8.8	270	0.270	FBORE	9.0	X10	Aluminum/Carbon/Ex X10 Shafts (Aluminum				size recommenda indicated with a l		
3-71	0.300	A/C/C	9.9	2613	0.265	X7	11.5		X10 ProTour Shafts (Al	uminum/C	arbon)	Size Ind	icates suggested	arrow size	
290	0.290	SDRIVE	7.8	2712	0.260	Х7	11.3	A/C/G A/C/C	A/C/G (Aluminum/Ca Aluminum/Carbon/Co			Spine Spir	ne of arrow size s ignates arrow mo	hown (sta	tic)
270	0.270	FBORE	9.0					Carb1	Carbon One				ignates arrow mo ed in grains ner in		

* When two sizes are listed together, the weight listed is for the first shaft.

Full Bore X7 Eclipse (7178–T9 alloy) XX75: Platinum Plus, Tribute, Jazz and Neos (7075 alloy)

Aluminum/Carbon	Pg#	Materials/Co	onstruction	Inserts	Points	Nock System	Nock Type	Weight Tolerance⁴	Straightness ¹	Color/Finish	Sizes
X10°	4	High-streng fiber bonde 7075 alloy (—barreled s	ed to a precision core tube	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 Pin	Pin Nocks X10 Overnock	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	1000, 900, 830, 750, 700, 650, 600, 550, 500, 450, 410, 380, 350 325
X10° PROTOUR™	6	High-streng fiber bonde 7075 alloy o single-tape	ed to a precision core tube —	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 or ProTour Pin	Pin Nocks	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	770, 720, 670, 620, 570, 520, 470 420, 380
A/C/E°	5	High-streng fiber bonde 7075 alloy o –barreled s	ed to a precision core tube	A/C/E Insert	Screw-in, One-piece or A/C/E Stainless Steel Break-off	A/C/E Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	(1250, 1100) ⁵ , 1000, 920, 850, 780, 720, 670, 620, 570, 520, 470 430, 400, 370
A/C/C™	8	High-streng fiber bonde 7075 alloy (ed to a precision	RPS Insert or Halfout Insert	One-piece Parabolic, NIBB, or RPS Point	UNI System	G Nock or Pin Nock	±0.5 grains	±.002" guaranteed	Black, Micro-smooth Finish	2-00, 3L-00, 3-00, 2L-04, 2-04, 3X-04, 3L-04, 3-04, 3L-18, 3-18, 3-28, 3-39, 3-49, 3-60, 3-71
「RIUMPH™	12		orced point end -layer wrapped or	N/A	Triumph One-Piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	500, 450, 400, 350
A/C/G™	7			A/C/E Insert	Screw-in, One-piece, A/C/E or A/C/G Stainless Steel Break-off	A/C/E & A/C/G Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grain	±.002" guaranteed	Polished Black Carbon	1500, 1300, 1150, 1000, 880, 810 710, 660, 610, 540, 480, 430
Carbon	Pq#	Materials/Co	onstruction	Inserts	Points	Nock System	Nock Type	Weight Tolerance⁴	Straightness ²	Color/Finish	Sizes
CARBON ONE™	9	UltraLite ca		A/C/E Insert	Carbon One	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±1 grains	Ž	Black, Micro-smooth Finish	1150, 1000, 900, 810, 730, 660, 600, 550, 500, 450, 410
APOLLO™	10	UltraLite ca	rbon fibers	A/C/E Insert	Apollo One-Piece	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±2 grains	±.005"	Black, Micro-smooth Finish	1200, 1070, 950, 840, 740, 670, 610, 560
FULL BORE™	17	SuperLite C multi-layer wrapped fil		N/A	One-piece Bullet	Super or G Nock UNI System	3D, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	350, 270
SUPERDRIVE™	16	Multi-layer Carbon fibe		N/A	One-piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	290
LIGHT SPEED 3D™ LIGHT-SPEED™	18	SuperLite C multi-layer wrapped fil		CB Insert	CB or RPS Point	UNI System	G Nock	±2 grains	±.001" ±.003"	Black, Smooth-matte Finish	500, 400, 340
FAT BOY™	13	SuperLite C multi-layer wrapped fil		RPS Insert	One-piece or RPS Point	Super or G Nock UNI System	3D, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	500, 400, 340
INSPIRE™	11	Small diam protruded o		NA	Zinc One-piece Point	NA	G Nock or X Nock	NA	NA	Black, Smooth-matte Finish	1400, 1200, 1000, 900, 750, 630, 570
Aluminum	Pg#	Aerospace Alloy	Strength³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
X ² 3™ X ² 7™	14		105,000	RPS Insert	NIBB, One-Piece Bullet or RPS Point	Super UNI System	3D Super, Super Nock or S Nock	±3/4%	+.001" Guaranteed	Diamond Polished Silver Anodized	2712, 2312, 2314, 2315
ECLIPSE™	15	7178-T9	105,000	Not Available	NIBB or One-piece Bullet	UNI or Super UNI System	3D Super Super Nock S Nock or G Nock	±3/4%	±.001" Guaranteed	Hard-Anodized Polished Black	1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413 2511, 2512, 2612, 2613, 2712
XX75 PLATINUM® PLUS	20	7075-T9	96,000	RPS Insert	NIBB, One-piece Bullet, or RPS Point	UNI or Super UNI System	3D Super Super Nock or S Nock	±1%	±.002" Guaranteed	Hard-Anodized Platinum Grey	1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315
JAZZ®	21	7075	90,000	RPS Insert 1716 & up	NIBB, One-piece Bullet, or RPS Point	Full-Diameter Taper Swage	Conventional or G Nock ⁶	±2%	±.005" Guaranteed	Hard-Anodized Purple/Silver	1214 ⁶ , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
TRIBUTE™	20	7075	90,000	RPS Insert 1716 & up	NIBB, One-Piece Bullet or RPS Point	Full-Diameter Taper Swag	Conventional or G Nock	<u>+</u> 2%	±.005" Guaranteed	Hard-Anodized Black	1214 ⁶ , 1413, 1416, 1516 1616, 1716, 1816, 1916, 2016
GENESIS™	18	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	N nock	±2.5 grains	±.005" Guaranteed	Hard-Anodized Bright Blue, Orange	1820
NEOS™	21	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	Conventional	±5%	±.008" Guaranteed	Hard-Anodized Gold	1618
	stand 2 Guar	dards than ATA anteed to mee	t to more stringent /ASTM methods. t or exceed similar of ss specifications.	carbon-	3 Tensile strength 4 Grains-per-shafts 5 Special order onl 6 1214 size Jazz us	s in a dozen bundle y.		UNI Sys	and Platinum Pl tem and G Nock istered Tradema		

Shaft Wei		Shaft Weight		Shaft Weight		Stock	Length ³	Conventional	UNI Sys		WIDD D :	One-piece	RPS ⁷	
Size	XX751	X7 ²	Spine @ 28" Span	75¹	X7 ²	Nock Size⁴	UNI Bushing ⁶	Super UNI Bushing ¹⁰	NIBB Point	Bullet Point	Insert Alum.	RPS ⁷ Point Size		
	Grains	per Inch	Deflection in Inches	In	ches	Inches	Grains	Grains	Grains ⁸	Grains ⁸	Grains ⁸	Grains ⁸		
1214	5.9	— —	2.501	26½	—	-	- Grains	—	- Grains	45	— Gruins	- Grains		
1413	5.9	_	2.036	26	_	7/32	_	_	_	35	_	_		
1416	7.2	_	1.684	27	_	7/32	2	_	46	52	_	_		
1514		6.8	1.379		261/2		5	_	61 ⁹		_	_		
1516	7.3	_	1.403	271/2	_	1/4	3	_	48	54	_	_		
1614	_	7.7	1.153		28		5	_	51	_	_	_		
1616	8.4		1.079	281/2	_	1/4	5	_	56	63	_	_		
1618	9.8	_	0.957	321/2	_	1/4	_	_	_	50	_	_		
1713	7.4	_	1.044	29	_		7	_	54		_	_		
1714		8.1	0.963	_	29	_	7	_	56	_	_	_		
1716	9.0	_	0.880	29		1/4	7	_	60	68	10	17/64		
1813	7.9	_	0.874	30	_	1/4	8	_	56	_	14	9/32		
1814	_	8.6	0.799	_	291/2		8	_	60	_	_	_		
1816	9.3	_	0.756	30		9/32	8	_	63	74	12	9/32		
1820	12.2	_	0.592	291/2	_	9/32	_	_	_	59	_	_		
1913	8.3	_	0.733	31	_	9/32	9	_	64	_	18	5/16		
1914	_	9.3	0.658		301/2	_	9	_	64	_	_	_		
1916	10.0	_	0.623	31	_	9/32	9	_	72	82	16	5/16		
2013	9.0	_	0.610	32	_	_	_	5	68	_	21	5/16		
2014	_	9.6	0.579	_	31½	_	(10)	5	71	_	_	_		
2016	10.6	_	0.531	32	_	_	_	4	80	90	20	5/16		
2114	9.9	9.9	0.510	31	321/2	_	(11)	7	78	100	25	5/16		
2212	_	8.8	0.505	_	321/2	_	(13)	9	102 ⁹	100	31	11/32		
2213	9.8	9.9	0.458	31	331/2	_	(13)	9	88	100	30	11/32		
2214	_	10.4	0.425	_	33	_	(13)	9	103 ⁹	100	_	_		
2311	_	8.9	0.450	_	33	_	(15)	11	99 ⁹	100	37	11/32		
2312	_	9.5	0.423	_	33	_	(15)	11	99 ⁹	100	37	11/32		
2314	10.7	10.8	0.391	32	331/2	_	(14)	10		100	34	11/32		
2315	11.7	11.8	0.342	32	34	_	_	11	_	100	37	11/32		
2412	_	9.7	0.400	_	34	_	(17)	12	110	100	40	11/32		
2413		10.5	0.365	_	34	_	(17)	12	110	100	40	11/32		
2511	_	9.6	0.348	_	34	_	(20)	15	108 ⁹	100	52	11/32		
2512	_	10.3	0.321	_	341/2	_	(20)	15	108 ⁹	100	52	11/32		
2612		10.7	0.285	_	341/2		(22)	17		150	58	3/8		
2613	_	11.5	0.265	_	341/2	_	(22)	17	_	150	58	3/8		
2712	_	11.3	0.260	_	341/2	_	_	19	_	150/300	_	_		

- 1 XX75 Tribute, Jazz, and Platinum Plus.
- 2 X7 Eclipse. 3 Length is approximate stock shaft length for each size.
 4 Nock size for conventional swaged nock taper.
- 6 Parentheses indicate smaller G Nock UNI Bushing size is available as an
- optional accessory.
 7 RPS = Replaceable Point System with 8-32 ATA Standard thread.
- 8 NIBB point grain weights are ± 0.5 grain. All other components are ± 1 grain.
- 9 This NIBB point will provide approximately an 8% F.O.C. All other NIBB points are approximately 7% F.O.C. F.O.C. is Front-of-Center balance position on the arrow shaft. 10 Super UNI Bushing accepts Super, S, & 3D Super Nock.
- 11 X Nock UNI Bushing.

A WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE @ www.bsafe.ws or 877-INFO-ETP.

ARROW BREAKAGE

Any arrow can become damaged. A damaged arrow could break upon release and injure you or a bystander. Damage to an arrow shaft, or any of its components, may occur from: improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. WARNING! NEVER SHOOT A DAMAGED ARROW.

ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft, nock, and other components to see that they have not been damaged. Before shooting, place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged. If your arrow is crested, inspect for damage on the crest surface. You may need to remove the cresting to make a thorough inspection. If shaft damage is present, **DISCARD THE ARROW.** WARNING! NEVER SHOOT A DAMAGED ARROW. Before each shot, inspect the nock for damage. If the nock is damaged, replace the nock. **WARNING!** NEVER SHOOT AN ARROW WITH A DAMAGED NOCK.

Before each shot, check that the nock is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or the fit is loose (rotates easily), inspect further for cracks in the nock end of the arrow shaft. If applicable, you may need to remove the cresting to make a thorough inspection. If there are cracks in the shaft or the nock is loose, **DISCARD THE ARROW.** NEVER SHOOT A DAMAGED ARROW.



ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests: 1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel and listen for cracking. Perform this test four to six times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged. WARNING! DISCARD THE ARROW. NEVER SHOOT A DAMAGED ARROW.

2. While still holding the point and fletching ends, twist the shaft in opposite directions. If the arrow "relaxes" or twists easily, the carbon



WARNING! DISCARD THE ARROW. NEVER SHOOT A DAMAGED ARROW.

A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, WARNING! DISCARD THE ARROW. NEVER SHOOT A DAMAGED ARROW. If you do not understand these instructions, or cannot adequately perform the above tests, seek the appropriate assistance.

LIMITED WARRANTY

The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see www.eastonhunting.com.

ARCHERY EXPERTS

For more information on arrow preparation and assembly, visit: www.eastonarchery.com

