

Our Mission

is to maximize the archer's confidence and experience by providing

Superior Products and Services.



E EASTON

ADVANCING ARCHERY'S LEGACY

www.eastonhunting.com



E EASTON

BOWHUNTING

2016

A Legacy of Innovation

Since 1922, Easton's mission has been to maximize the archer's confidence and experience by providing superior products and services.



Dual-Composition Aluminum/Carbon materials with full range of

Diameters

offers **BOW HUNTERS**

more **PENETRATION**

Easton's 94 years of relentless innovation has culminated in a full range of small diameter shafts—field proven to increase penetration, perform better in a crosswind to give bowhunters the best results possible in a state-of-the-art hunting arrow.

STANDARD (S) DIAMETER



6.5MM

REDUCED (H) DIAMETER



6MM

MICRO (X) DIAMETER



5MM

ULTRA-MICRO (G) DIAMETER



4MM

(actual sizes)

MORE PENETRATION >>>



LARGER DIAMETER—MORE FRICTION

SMALLER DIAMETER—LESS FRICTION



4MM FMJ INJEXION™

FULL METAL JACKET INJEXION

4MM
DIAMETER

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Deep Six Field Point
	GPI	Deflection in inches	Inches	100/125 Grains
460	9.0	0.460	31.00	DP6-4
400	9.8	0.400	31.50	DP6-4
330	11.0	0.330	32.00	DP6-5
280	12.0	0.280	32.50	DP6-5

- Pre-installed Deep Six nocks
- Deep Six thread steel HIT inserts
- High-strength carbon core with 7075 alloy metal jacket
- Easy target pull
- Weight tolerance: ± 2 grains
- Straightness: $\pm .002$ "

For use with Deep Six broadheads & field points.

See page 55 for detailed component information.

INCLUDED:



Deep Six™ Steel
G HIT Insert



Deep Six™ Nock

DEEP SIX

DEEP SIX ULTRA-MICRO 4MM

WITH THE MOST MODERN BROADHEAD CONNECTION

—MAXIMIZE YOUR BOW

WITH THE MOST **PENETRATION**

5MM FULL METAL JACKET™



5MM FULL METAL JACKET

FULL METAL JACKET

5MM
DIAMETER

Size	Shaft Weight	Spine @ 28" Span	Stock Length	RPS Point	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	O.D. Inches	Size (5 Grains)
500	9.1	0.500	31.0	17/64	BAR3
400	10.2	0.400	31.5	17/64	BAR3
340	11.3	0.340	32.0	9/32	BAR5
300	12.0	0.300	32.5	9/32	BAR5

- Pre-installed X Nocks
- X HIT 8-32 inserts included
- High-strength carbon core with 7075 metal jacket
- Easy target pull
- Straightness: ±.002"

Deep Six thread RPS steel inserts & brass X HIT 8-32 break-off inserts sold separately

INCLUDED:



X HIT® Insert

X Nock™

See page 55 for detailed component information.

MICRO 5MM PERFORMANCE

MORE PENETRATION

ADD KINETIC PUNCH FOR THICK HIDE & BONE WITH A

FULL METAL JACKET



Available in Lost Camo™

6MM FULL METAL JACKET™

NEW



FULL METAL JACKET

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	Size (5 Grains)
470	8.8	0.470	31.0	BAR6
390	9.7	0.390	31.5	BAR7
320	10.6	0.320	32.0	BAR7

INCLUDED:

- 6MM DIAMETER H
- ST RPS Insert
- H Nock™

- Pre-installed H nocks
- ST RPS 8-32 inserts
- Reduced-diameter 6MM carbon core with 7075 alloy metal jacket
- Easy target pull
- Straightness: ±.003"

Brass H 8-32 break-off inserts sold separately
See page 55 for detailed component information.

6MM FMJ

Why shoot an ordinary
CARBON ARROW?

Add the
PENETRATION

POWER OF A
FULL METAL JACKET

4MM INJEXION™ CARBON & A/C INJEXION

the pinnacle of EASTON CARBON arrows
—ULTRA-MICRO FOR MORE

VELOCITY AT IMPACT & DEEPEST PENETRATION

CARBON INJEXION

4MM
DIAMETER

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Deep Six Field Point
	GPI	Deflection in inches	Inches	100/125 Grains
480	8.3	0.480	31.25	DP6-4
400	8.9	0.400	31.75	DP6-5
330	10.2	0.330	32.25	DP6-5

- High-strength carbon fiber construction
- Straightness: ± .003"

DEEP
SIX

4MM A/C INJEXION

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Deep Six Field Point
	GPI	Deflection in inches	Inches	100/125 Grains
450	8.6	0.450	31.75	DP6-4
390	9.5	0.390	32.25	DP6-5
330	10.5	0.330	32.75	DP6-5

- High-strength carbon fiber bonded to a precision 7075 alloy core
- Straightness: ± .002"

See page 55 for detailed component information.

INCLUDED:



Deep Six Steel
G HIT Insert



Deep Six Nock

CARBON AND A/C INJEXION:

- Pre-installed Deep Six Nocks
- Deep Six thread G HIT steel inserts

For use with Deep Six
broadheads &
field points.

Greg Easton - Caribou 2015

5MM DEEP SIX XD™

DEEP SIX

5MM
DIAMETER

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	Size (5 Grains)
490	8.1	0.490	31.0	BAR3
400	9.0	0.400	31.5	BAR4
340	9.5	0.340	32.0	BAR5
295	10.7	0.295	32.5	BAR6

- Pre-installed X Nock
- Deep Six thread RPS steel inserts
- Straightness: ± .003"

For use with Deep Six broadheads & field points.

INCLUDED:



Deep Six™ thread
X Steel RPS Insert



X Nock™

See page 55 for detailed component information.

DEEP SIX
TECHNOLOGY with
the most modern
broadhead connection

—SUPERIOR STRENGTH & PENETRATION

5MM AXIS TRADITIONAL™

Nothing beats the look of

NATURAL —WOODGRAIN CARBON AXIS

and the appeal of
original 1922 Doug Easton Traditional shafting

AXIS TRADITIONAL™

5MM
DIAMETER

Size	Shaft Weight	Spine @ 28" Span	Stock Length	RPS Point	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	O.D. Inches	Size (5 Grains)
600	7.9	0.600	30.5	17/64	BAR3
500	8.9	0.500	31.0	17/64	BAR3
400	9.8	0.400	31.5	9/32	BAR4
340	10.3	0.340	32.0	9/32	BAR5

- Pre-installed X Nock
- X HIT 8-32 inserts
- Straightness: ± .003"
- High-strength carbon-composite fibers

Brass X HIT® 8-32 Break-Off Insert & Deep Six thread RPS sold separately

INCLUDED:



X HIT® Insert X Nock™

See page 55 for detailed component information.

5MM AXIS™




AXIS™

5MM
DIAMETER

Size	Shaft Weight	Spine @ 28" Span	Stock Length	RPS Point	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	O.D. Inches	Size (5 Grains)
700	6.1	0.700	31.5	17/64	BAR3
600	7.2	0.600	30.5	17/64	BAR3
500	8.1	0.500	31.0	17/64	BAR3
400	9.0	0.400	31.5	17/64	BAR4
340	9.5	0.340	32.0	9/32	BAR5
300	10.7	0.300	32.5	9/32	BAR6
260	11.5	0.260	34.0	9/32	BAR6

- Pre-installed X Nock
 - X HIT 8-32 inserts
 - Straightness: ± .003"
 - High-strength carbon-composite fibers
- Brass X HIT® 8-32 Break-Off Insert & Deep Six thread RPS sold separately

INCLUDED:



X HIT® Insert

X Nock™

See page 55 for detailed component information.

The hands-down
PROVEN

**SMALL
DIAMETER**
ALL-CARBON ARROW **FASTER, DEEPER**
—**DEADLIER**

6MM BLOODLINE™

6MM

BLOODLINE™

6MM
DIAMETER 

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	Size (5 Grains)
480	6.8	0.480	29.5	BAR7
400	7.7	0.400	31.0	BAR7
330	8.7	0.330	31.5	BAR7

- ST RPS 8-32 inserts
- Pre-installed H Nocks
- Straightness: ± .003"
- High-strength, carbon fibers

See page 55 for detailed component information.

INCLUDED:



ST RPS™ Insert



H Nock™

FASTER
FLATTER SHOOTING—
CARBON FIBER
WHEN SPEED IS WHAT YOU SEEK

6MM HEXX™

FACTORY STRAIGHT
TIGHT TOLERANCES
THAT ARE
**—HIGH VELOCITY
EFFECTIVE**

HEXX™

6MM
DIAMETER 

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	(5 Grains)
480	6.3	0.480	29.50	BAR5
400	7.2	0.400	31.00	BAR6
330	7.9	0.330	31.50	BAR6

- Pre-installed H nocks
- Microlite H 8-32 inserts
- Lightweight high velocity carbon
- Straightness: ± .001"
- Brass 8-32 inserts sold separately

See page 55 for detailed component information.

INCLUDED:



Microlite H Insert™



H Nock™

6MM DA'TORCH™



DA'TORCH™

6MM
DIAMETER 

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Broadhead Adapter Ring
	GPI	Deflection (inches)	Inches	(5 Grains)
480	6.3	0.480	29.50	BAR5
400	7.2	0.400	31.00	BAR6
330	7.9	0.330	31.50	BAR6

- Pre-installed X nock with UNI bushing
- ST RPS 8-32 inserts
- Detailed graphics high velocity carbon
- Brass 8-32 inserts sold separately
- Straightness: ± .001"

INCLUDED:



ST RPS™ Insert



X Nock™



X Nock™
UNI Bushing®

See page 55 for detailed component information.

THE
LIGHTER, FASTER
MORE VISIBLE 6MM DIAMETER
—ALL CARBON ARROW

6MM AFTERMATH™

REDUCED DIAMETER

MORE PENETRATION
— **HIGH-VALUE**
CARBON ARROWS

AFTERMATH™

6MM
DIAMETER 

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	Size (5 Grains)
500	7.3	0.500	30.75	BAR6
400	8.8	0.400	31.25	BAR7
340	9.6	0.340	31.75	BAR7
300	10.2	0.300	32.25	BAR7

- Pre-installed H nocks
- ST RPS 8-32 inserts
- Straightness: ± .005"
- High-strength carbon fibers

See page 55 for detailed component information.

INCLUDED:



ST® RPS Insert™



H Nock™

6MM ION™

MADE IN THE

USA

WITH EASTON CARBON

TO

—NAIL

YOUR TARGET

ION™

6MM
DIAMETER 

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	Size (5 Grains)
600	6.4	0.600	30.50	BAR7
500	7.3	0.500	30.75	BAR7

- Pre-installed H nocks
- ST RPS 8-32 inserts
- Straightness: ± .003"
- High-strength carbon fibers

INCLUDED:



ST RPS™ Insert



H Nock™

See page 55 for detailed component information.

6.5MM FLATLINE™

ULTRA LIGHTWEIGHT FILLS
THE NEED FOR SPEED
 EASTON-ENGINEERED FOR
**—HIGH VELOCITY
 SHOOTING**

FLATLINE™ 6.5MM DIAMETER S

Size	Shaft Weight	Spine @ 28" Span	Stock Length
	GPI	Deflection in inches	Inches
500	6.5	0.500	31.50
400	7.4	0.400	32.00
340	8.2	0.340	32.50

- Pre-installed MicroLite Super Nock
- MicroLite 8-32 inserts
- Multi-layer wrapped carbon fibers
- Straightness: ± .003"

INCLUDED:



MicroLite™ Insert MicroLite™ Super Nock®

See page 55 for detailed component information.

6.5MM BOWFIRE™

**HIGH
 VISIBILITY**
 LIGHT-WEIGHT
arrows that are
**—FASTEST
 TO THE TARGET**

BOWFIRE™ 6.5MM DIAMETER S

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Broadhead Adapter Ring
	GPI	Deflection in inches	Inches	Size (5 Grains)
480	7.5	0.480	29.50	BAR7
400	8.5	0.400	31.00	BAR8
330	9.6	0.330	31.50	BAR8

- Pre-installed S Nock
- CB 8-32 inserts
- Detailed graphic bright white finish
- Straightness: ± .003"

INCLUDED:



CB Insert

S Nock™

See page 55 for detailed component information.

GAMEGETTER™

A TRUE BOW HUNTING LEGEND—

MORE GAME HAS FALLEN

To EASTON XX75's

than any other hunting arrow ever made

—GET THE NOSTALGIA OF THIS
BOW HUNTING FAVORITE

GAMEGETTER™

Sizes 500, 400, 340, 300

Strength (PSI) 96,000

Nock System Super UNI

- Pre-installed Super Nocks (installed)
- RPS inserts included
- 7075-T9 alloy
- Straightness: ± .003"

INCLUDED:



RPS Insert



Super UNI Bushing®



S Nock™

ALUMINUM



Jim Easton

CAMO HUNTER™



Greg Easton

CAMO HUNTER™

Sizes 1816, 1916, 2013, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2314, 2315, 2317, 2413

Strength (PSI) 96,000

Nock System Super UNI and X Nock

- Pre-installed UNI bushings
- RPS inserts included
- 7075-T9 alloy
- Pre-installed Super Nocks or X Nock
- Tensile strength (psi): 96,000
- Guaranteed straightness: ± .002"

INCLUDED WITH ALL SIZES EXCEPT 1816-1916:



RPS Insert



Super UNI Bushing®



Super Nock®

INCLUDED WITH 1816 & 1976 ONLY:



X UNI Bushing®



X Nock™

See page 55 for detailed component information.

ALUMINUM

A MADE-IN-USA

AMERICAN CLASSIC

—Deliver your broadhead with precise-built

XX75 ACCURACY

LEGACY™

TRADITIONAL SINCE 1922

Doug Easton started it all making longbows, leather quivers, & cedar shafting in his small, California shop.

THE XX75 LEGACY DESIGNED WITH EASTON'S EARLY DAYS IN MIND...

—HATS OFF TO YOU DOUG

LEGACY™

Sizes 1916, 2016, 2018, 2117, 2216, 2219

Strength (PSI) 96,000

Nock System Conventional


- 7075-T9 alloy
- Conventional nocks**
- Full-diameter taper nock swage
- RPS inserts included (fletched arrows come with both nocks & inserts included)
- Guaranteed straightness: ± .002"

ALUMINUM



Doug Easton

FMJ BOWFISHING™ BUBBA BUOY™

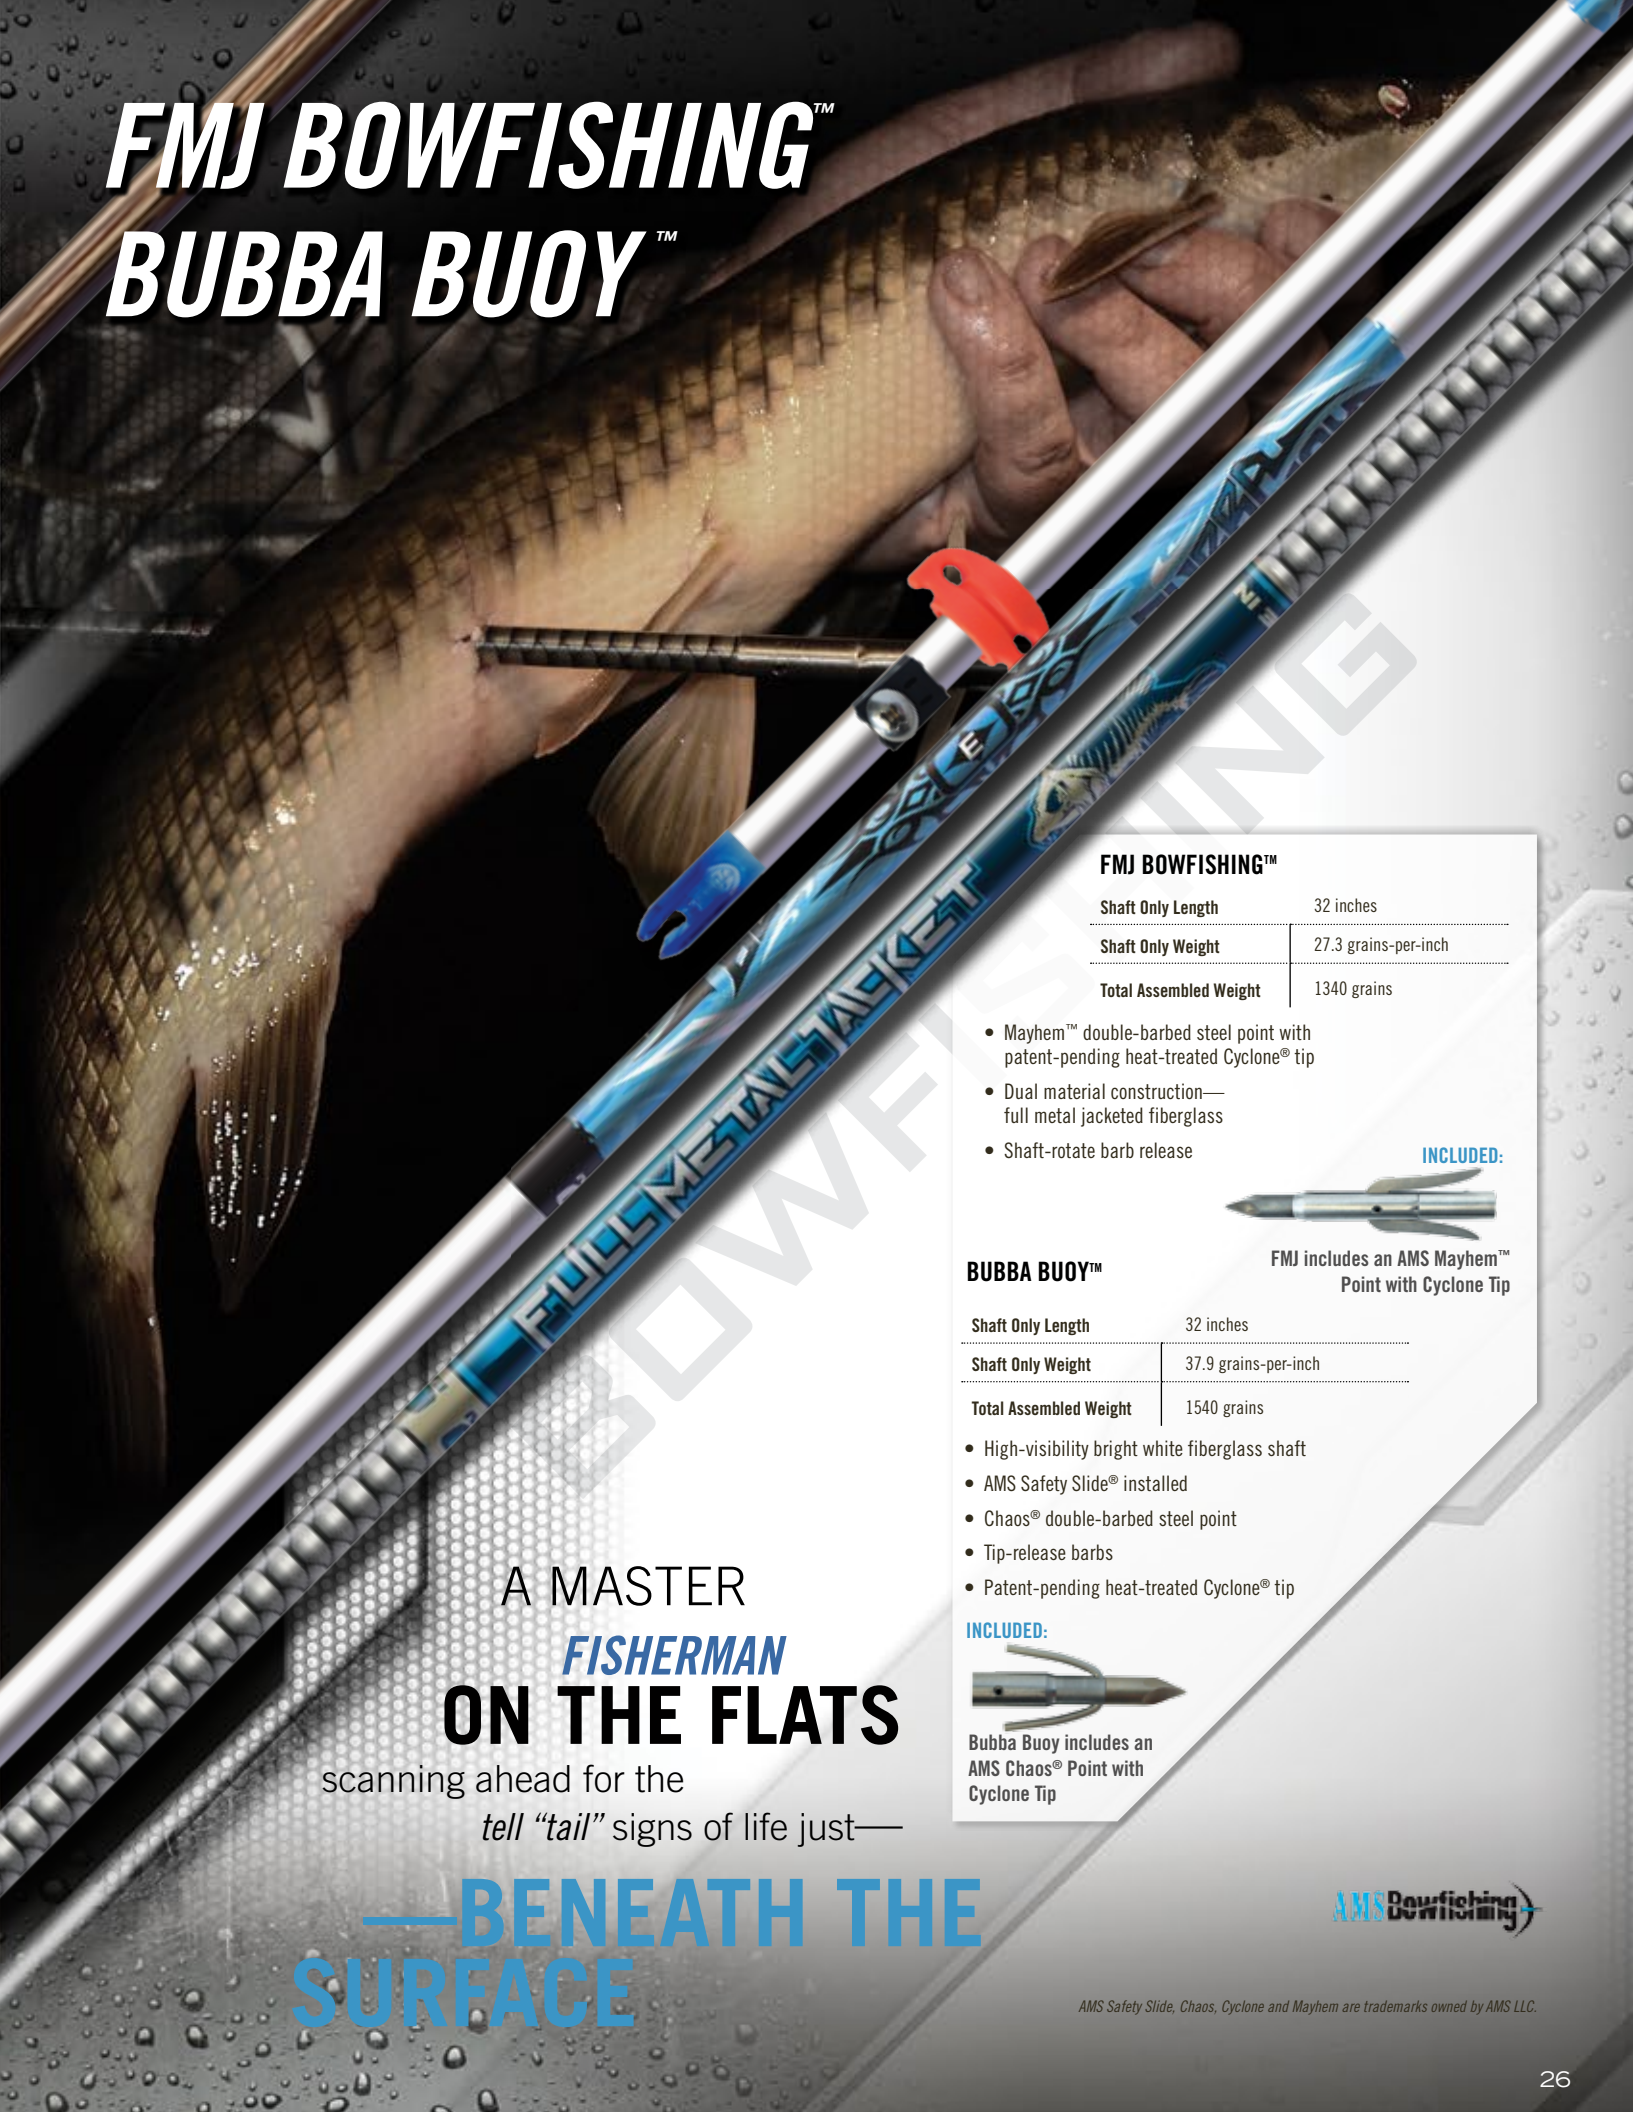

FMJ BOWFISHING™

Shaft Only Length	32 inches
Shaft Only Weight	27.3 grains-per-inch
Total Assembled Weight	1340 grains

- Mayhem™ double-barbed steel point with patent-pending heat-treated Cyclone® tip
- Dual material construction—full metal jacketed fiberglass
- Shaft-rotate barb release

INCLUDED:



FMJ includes an AMS Mayhem™ Point with Cyclone Tip

BUBBA BUOY™

Shaft Only Length	32 inches
Shaft Only Weight	37.9 grains-per-inch
Total Assembled Weight	1540 grains

- High-visibility bright white fiberglass shaft
- AMS Safety Slide® installed
- Chaos® double-barbed steel point
- Tip-release barbs
- Patent-pending heat-treated Cyclone® tip

INCLUDED:



Bubba Buoy includes an AMS Chaos® Point with Cyclone Tip

A MASTER
FISHERMAN
ON THE FLATS
scanning ahead for the
tell "tail" signs of life just—

—BENEATH THE SURFACE



AMS Safety Slide, Chaos, Cyclone and Mayhem are trademarks owned by AMS LLC.

FMJ CROSSBOW™

BOWFIRE™

THE KINETIC
PENETRATION POWER

of Full Metal Jacket

Carbon ammo

—PUTS GAME
ON THE GROUND

BLOODLINE™ XX75 MAGNUM™

FMJ™ CROSSBOW

- RPS inserts
- FMJ flatback or halfmoon nocks
- Brass bolt inserts available
- High-strength carbon core with 7075 alloy metal jacket
- Easy target pull
- Straightness: ± .003"

Length	Shaft Weight
Inches	GPI
22	13.7

BOWFIRE™

- Aluminum bolt inserts
- Flatback or halfmoon nocks
- Brass bolt inserts available
- Detailed graphic overlay carbon
- Guaranteed straightness: ± .003"

Length	Shaft Weight
Inches	GPI
20	11.3
22	11.3

BLOODLINE™

- High-strength carbon composite construction
- Inserts & nocks included

Length (inches)	Shaft Weight (GPI)
20	10.5
22	10.5

XX75 MAGNUM™

- Hard-anodized finish
- Flatback or halfmoon nocks
- Tensile strength (psi): 96,000
- 7075-T9 alloy
- Lengths: 20"—2216, 2219
22"—2219

Length (inches)	Bolt Size	Shaft Weight (GPI)
20	2216	12.0
20	2219	13.8
22	2219	13.8



Brass Bolt Insert



Aluminum Bolt Insert



RPS Insert



Halfmoon Nock^a



Flatback Nock^a

^aInserts & nocks included with fletched bolts. ^bDealer's Option

NEW CONTOUR™ HUNTER uses our proven Tri-Mod carbon technology to tame vibration while balancing the bow for better aim and shot execution. The go-to choice for both bowhunters and bowhunter limited class competitors, Contour Hunter is the most advanced stabilizer we've ever developed for the modern bowhunter. Available in Black, Realtree® Max 1, and Realtree® Xtra.

CONTOUR Hunter		
Size	8 in-21 cm	11 in-28 cm
Ounces	2.3	2.7
Grams	65	76



NEW CONTOUR CS™ features the most extreme stiffness to weight ratio we have ever developed for a stabilizer. Featuring aerospace-grade graphite fiber, the Contour CS is optimized for shooters looking for the stiffest possible stabilizer with superior hold and a wind-cheating slim profile for rock-solid aiming. Contour CS—the most advanced stabilizer ever, from the company that pioneered carbon stabilizers—Easton.

CONTOUR CS Stabilizer			
Size	27 in-69 cm	30 in - 76 cm	33 in - 84 cm
Ounces	4.0	4.3	4.5
Grams	115	122	128



NEW PRO-LINK™ EXTENDER The podium-proven Easton Pro-Link stabilizer extension is reinforced with a full-length Internal Stainless Steel Reinforcement Beam. This super-strong beam links the precision internal-bonded ferrules at each end to create a torque-resistant system capable of handling heavy loading, abusive v-bar torquing, and the stress of high-energy bows. The Internal Stainless Steel Beam of Pro-Link Extension has been tested and proven at the highest levels of competition by some of the best archers on the planet. Pro-Link is also the stiffest extension we've ever made. The precision-made Pro-Link extension is ideally matched to the Easton Contour and Z-Flex system stabilizers, and is fully compatible with most other ATA compliant stabilizer systems with 5/16"-24 threads.

PROLINK Extender			
Size	6 in-15 cm	5 in - 13 cm	4 in - 10 cm
Ounces	4.64	4.32	4.00
Grams	131.5	122.5	113.4



CONTOUR™ Proven performance Contour stabilizer uses a complex carbon fiber to damp out post-shot vibration while providing an unmatched aiming experience, even in crosswinds. The Windcutter-360™ design of Contour promotes a steady confidence in crosswinds while the large-diameter base promotes enhanced vibration reduction with no need for rubber decouplers. Choose the super-light, Original Contour for a slightly softer feel on follow-through. Light and efficient, Contour is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari-weights for competitors seeking the most compact setup.

Size	CONTOUR Stabilizer				CONTOUR Side Rod		
	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	3.7	4.0	4.3	4.6	2.5	2.7	2.9
Grams	106	114	123	131	71	75	83



Z FLEX™ provides extreme stiffness and high-moment weight system compatibility with minimum aiming float. AVRS™ chamber for rapid vibration amplitude dissipation after the shot. Z-Flex is compatible with 5/16"-24 flat vari-weights.



	Z-FLEX Stabilizer				Z-FLEX Side Rod		
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in - 84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	5.8	6.2	6.5	6.9	3.2	3.5	3.9
Grams	164	175	186	196	92	99	111

- Ultra-stiff design for steady aiming
- AVRS damping for active-shock management
- Lowest mass and highest efficiency

A/C™ PRO Easton's technologically advanced A/C Pro stabilizers are among the most efficient stabilizers ever developed. Featuring the incredible stiffness of high-modulus carbon fiber and the high-frequency response preferred by top archers across the globe, the Ultra-High Resonance A/C Pro stabilizer is equipped with the proven, low-mass AVRS system. From Olympic and World Championship podiums to the top of the local league leader board, A/C Pro is proven across the globe. A/C Pro is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari weights.



	A/C PRO Stabilizer			A/C PRO Side Rod		
Size	24 in-61 cm	29 in-74 cm	34 in-86 cm	9 in-23 cm	10 in-25 cm	11 in-28 cm
Ounces	4.3	5.0	6.0	1.7	1.8	1.9
Grams	122	142	170	48	51	54

- Proven A/C Construction
- AVRS Damping System for Shock Management
- Stiff Design for Steady Aiming




Both Contour and Z Flex Stabilizers come with a reusable protective sleeve



MOUNTS

FIXED V-BAR WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt— included

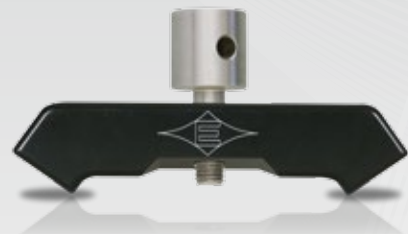

ADJUSTABLE V-BAR WITH BOLT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt included



ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel eye bolt included



CONTOUR AND Z-FLEX CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down



QUICK DISCONNECT BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down
- Available in 0 and 10 Degree



VARI-WEIGHTS

NEW Now available in black.



ORIGINAL VARI-WEIGHTS 1/4 -20 THREAD

	Ounces	Grams
Module	1.5	43
1/2 Module	0.75v	21
Cap	1.5	43

FLAT VARI-WEIGHTS 5/16-24 THREAD*

	Ounces	Grams
Contour Base	2.0	57
Z Flex Base	2.0	57
1 Oz.	1.0	28.5
2 Oz.	2.0	57
4 Oz.	4.0	114

*Mix and match any combination of Flat Weights for custom balance, aiming, and aesthetics.



QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz. and 1.0 FL oz.



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz. and 1.0 FL oz.



FASTSET™ VANE GEL

- Sizes: 3 gram and 9 gram



24-HOUR INSERT EPOXY SYRINGE

- Provides a permanent bond
- Flexible, non-brittle formula



DR. DOUG'S™ 3-STEP BOWSTRING MAINTENANCE KIT

- String Cleaner —removes dirt, wax & contaminants from bowstring
- Bowstring Revitalizer—restores color & penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax—protects longer & better than conventional waxes



In the spirit of the man who shaped modern archery, Doug Easton's legacy of innovative genius continues today in the full line of "Dr. Doug's" products.

QUICKBOND™ ARROW BUILDING & REPAIR KIT

- Complete vane and insert adhesive kit—enough for a dozen arrows.
- Orange – Quickbond Insert Glue
- Clear – Quickbond Vane Adhesive
- Red – VC-3 Threadlocker
- Low Temperature Hot-melt Stick




CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials




HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick



VC3® THREAD LOCKER

- Unique reusable formula.
 - Apply to broadheads, practice points, & bow accessories for solid mounting and reduced vibration.
- VC-3 is a registered trademark of ND Industries, Inc.



QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



FLETCH-TITE® PLATINUM

- Size: 22-gram tube
- Fletch-Tite® is a registered trademark of Bohning Company LTD





(A) DR. DOUG'S™ FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula makes for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



(B) ARROW PULLER WEDGE

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit




(C) ARROW PULLER PUCK

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage



(D) PRO HEX FOLD UP SET - STD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050

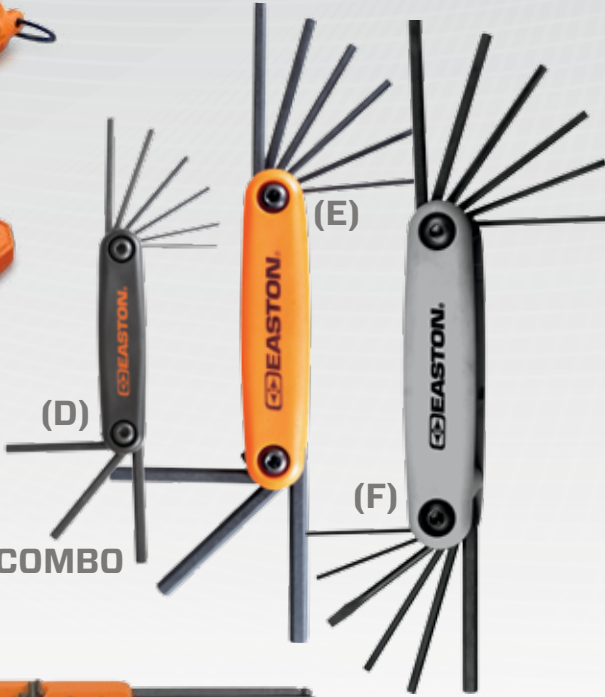

(E) PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64

(F) PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, Metric: 1.5, 2.5, 3.0, and 2.8 flat blade

(G) PRO HEX STUBBY 10 PCS. SHORT L SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



(H) PRO HEX LIMB MASTER ALLEN WRENCHES

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually in sizes: 7/32, 3/16, 1/4



(I) PRO ARCHERY NEEDLE NOSE PLIERS

- A must for any serious bow mechanic



(J) ELITE NOCK AND D-LOOP PLIERS

- Convenient and versatile archery tool
- Patent-pending dual-jaw design
- Maximizes mechanical advantage for tightest possible D-loops
- Six tools in one



(K) UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



(L) BROADHEAD WRENCH

- For safe installation & removal of broadheads from arrows



(M) PRO SHOP TOWELS



(M) PRO SHOP TOWELS

- Durable and disposable lint-free towel especially suited for preparing arrow shafts for fletching and point installation



(N) BOW STRINGER

- Molded rubber-cupped stringer for easy and recommended stringing of target recurve bow



(O) BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep-sights.
- Includes 1m red thread & 1m black thread



(P) BCY POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75 yard spool

(Q) BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- 1m length

BCY is a trademark of BCY Bowstring.




(R) T-BOW SQUARE & L-BOW SQUARE

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up



(S) 9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from G to Max 27 diameters

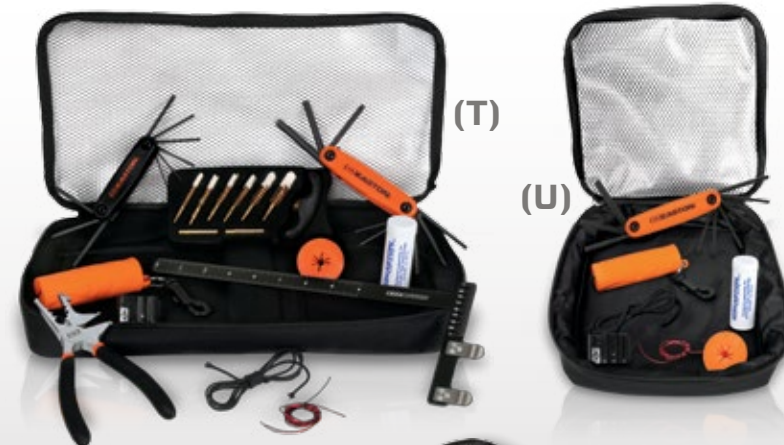

ARCHERY ESSENTIALS 12-PIECE PRO SHOP TOOL KIT (T), 8-PIECE VALUE PACK (U), AND 6-PIECE CROSSBOW ESSENTIALS KIT (V)

- Kit items save 30% versus items sold separately. Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors.

- 12 and 8 Piece Kits Include:
- Extra Large Folding Allen Wrench Set
 - Nock Installation & Removal Tool
 - Wedge Arrow Puller
 - Zippered Case Cube
 - Bowstring Wax
 - Serving Thread
 - D-Loop Rope
 - Broadhead Wrench

- 12-Piece Kit Adds:
- D-Loop Pliers
 - Bow Square- L Model
 - Small Folding Allen Wrench Set
 - Arrow Prep Tool Kit

- 6-Piece Crossbow Kit includes:
- Small Folding Allen Wrench Set
 - Zippered Cube Case
 - Rail Lube Wax
 - Wedge Arrow Puller
 - Broadhead Wrench
 - Scope Lens Cleaner Cloth



BTV™ CROSSBOW VANES

- Height and profile designed specifically for high-powered crossbows
- Stiffening ridge cuts flutter at high speeds
- Increases accuracy and tightens broadhead groups



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
300	3.00	.500	10	<ul style="list-style-type: none"> Bright Green Yellow Red Fire Orange White 	Clamshell or 100-count bag

All weights are within ±0.5 grain.

Diamond Vanes®



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
175	1.750	.375	3	<ul style="list-style-type: none"> Bright Green Sunset Gold Yellow Fire Orange White Black Hot Pink 	Clamshell or 100-count bag
235	2.375	.375	4		
280	2.875	.500	6		
380	3.875	.500	8		

All weights are within ±0.5 grain.

XPV™ Vanes

High performance for broadhead use



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
200	2.00	.568	6	<ul style="list-style-type: none"> Bright Green Red Yellow Indigo Fire Orange Hot Pink White Blue 	100-count bag 500-count box

All weights are within ±0.5 grain.

Tite Flight™ Vanes

Special rib adds stiffness to cut in-flight flutter and noise.


Shield is 200 Only



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
175	1.750	.375	3	<ul style="list-style-type: none"> Bright Green Black Yellow Fire Orange Hot Pink White 	100-count bag
200	2.000	.330	4		

All weights are within ±0.5 grain.

FEATHERS



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
3.0 R	3.000	.400	1.3	<ul style="list-style-type: none"> Black Blue Brown Yellow FL Green Gray Orange Red White Yellow Chartreuse 	Clamshell or 100-count bag
4.0 R	4.000	.550	2.8		
5.0 R	5.000	.600	4.5		

All weights are within ±0.5 grain.

EZ FLETCH™ TOOL NEW

(A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"

(C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"

(B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"

(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"

SPIN WING VANES®



1.75-inch vanes in black, white, blue, red, and yellow

Available in right or left

Packaging - 50-count bag

Colors ● Black ○ White ● Blue ● Red ● Yellow

Spin Wing Vane® is a registered trademark of Range-O-Matic Archery Company

DIAMOND™ SHRINK CRESTS

Bloodline - 7"

A/C Injexion Gold - 7"

Carbon Injexion Silver - 7"

HEXX/ACC Pro Hunting - 7"

ION Blue - 7"

ION Silver - 7"

AXIS Weave - 7"



ELITE FIELD QUIVER *NEW*

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release cobra™ style buckle for secure operation and positive engagement.
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Quiver Belt Included. Release Pouch Sold Separately.
- Colors*: Red, Blue, Grey, White, and Carbon Black



DELUXE FIELD QUIVER *NEW*

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Release Pouch and Belt Sold Separately
- Colors*: Silver, Green, Red, Blue, Pink, Purple, and Realtree™ Xtra



ELITE QUIVER BELT *NEW*

- Sizes: One size fits most
- Innovative Hook & Loop Adjustment
- Quick-release cobra™ style buckle



ELITE RELEASE POUCH *NEW*

- Sizes: One size fits most



ELITE HIP QUIVER *NEW*

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release cobra™ style buckle for secure operation and positive engagement.
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Quiver Belt Included. Release Pouch Sold Separately.
- Colors*: Red, Blue, Grey, White, and Carbon Black



DELUXE QUIVER BELT *NEW*

- Sizes: One size fits most
- Innovative Hook & Loop Adjustment
- Easy On/Off T-Buckle Connection



DELUXE RELEASE POUCH

- Sizes: One size fits most



DELUXE HIP QUIVER *NEW*

- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Attached upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory attachment rings
- Release Pouch and Belt Sold Separately
- Colors*: Silver, Green, Red, Blue, Pink, Purple, and Realtree™ Xtra



FLIPSIDE™ 4-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop upper and lower pockets for wear on right or left side
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra®



FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters —for wear on either side
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra®



REPLACEMENT FLIPSIDE ARROW TUBE



REPLACEMENT BELT CLIP



FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra®



RANGE LITE™ HIP QUIVER

- Lightweight design
- Molded shank and arrow separator
- Easy-access pockets
- Top pocket for releases, pens or smart phones
- Available in right or left hand configurations
- Internal pocket dividers
- Colors: Silver, Red, Blue, Pink, and Realtree Xtra®




GENESIS® 4014 BOW CASE

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Pink, Blue, Black and Lost® Camo



MICRO FLATLINE™ 3617 BOW CASE

- Modern designed bowcase for maximum protection and space saving compact size
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy grab pulls
- Fits most bows; interior dimensions of 35" x 16"
- Exterior mesh accessory pocket
- Colors: Black, Pink, Realtree Xtra® Realtree Max-1™, and Lost® Camo




FLATLINE™ 4417 BOW CASE

- Sleeve-style bow case for maximum protection and space saving compact size.
- Compatible with all Easton arrow tote and arrow case models.
- Premium oversized #10 zippers with easy grab pulls
- Fits most bows and arrow cases; interior dimensions of 43" x 16"
- Two exterior and one interior accessory pockets for release aids, range finders, tools or other archery essentials
- Colors: Black, Realtree Xtra® Realtree Max 1™, and Lost® Camo



DELUXE 4517 BOW CASE & 4517 LADIES BOWCASE

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear.
- Compatible with all Easton arrow tote and arrow case models.
- Premium oversized #10 zippers with easy-grab pulls
- Cavernous 3.5" case-cube compatible fleece-lined padded interior (Case Cubes sold separately)
- Fits most bows —interior dimensions 44" x 16"
- 360° padding for complete bow protection
- Movable bow-anchoring straps for rock-solid bow security
- Elastic arm band with adjustable cord locks
- Colors: Black, Realtree Xtra®, Realtree Max-1®, Lost® Camo, Realtree Max-1®/Lavender



DELUXE 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Compatible with the Easton Deluxe Crossbow Arrow Case
- Case-cube compatible interior fleece hook and loop lining with adjustable bow attachment straps
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection.
- Compatible with both standard and reverse limb crossbows
- Includes one Corner Case Cube pocket
- Inside dimensions 41" x 26"



DELUXE 3915 & 3615 COMPOUND/ RECURVE ROLLER BOW CASE

- Advanced wheeled compact travel case for compound/recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Available in two sizes (36"Lx15"Wx9"H) and (39"Lx15"Wx9"H)
- Compatible with the Easton Deluxe 33" & 36" Arrow Cases
- Case Cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Airline Travel Cover recommended (sold separately)



ELITE™ 4717 DOUBLE BOW CASE

- Two full-size target bow compatible
- Inside dimensions 46"x16"
- Case-cube compatible double fleece twin main compartment.
- Double or single bow with opposite side clothing storage.
- Dense EVA foam 360° exterior padding
- Re-positionable Velcro bow anchor system
- Six interior and exterior accessory pockets
- Compatible with Easton Arrow Tote
- The best YKK® reverse coil double zipper pulls
- Shoulder strap included
- Available in Pro Tour black/grey/orange



ELITE 4716 & 4416 DOUBLE ROLLER BOW CASE

- Two full-size target bow compatible
- Triple field-replaceable roller bearing wheels.
- Available in two sizes (47"Lx16"Wx10"H) and (44"Lx16"Wx10"H) outside dimensions.
- Double-walled protection – composite armor shield + foam 360° exterior padding.
- Case-cube compatible double fleece main compartment.
- Double seatbelt system to securely anchor bows
- Padded internal divider blanket for layered storage.
- Five interior accessory pockets, adjustable padded walls.
- Three expanding outside luggage compartments
- Four exterior accessory pockets
- The best YKK® reverse coil double zipper pulls.
- Compatible with Easton Arrow Tote
- Airline Travel Cover recommended (sold separately)
- Available in Pro Tour black/grey/orange

YKK® is a registered trademark of YKK® Corporation



ELITE™ RECURVE BACKPACK

- 6061-T6 aluminum internal frame suspension for easy carrying of heavy loads
- Fits up to 27" recurve handles and long limbs
- Collapsible stabilizer sleeve & arrow tote
- External, cinch-able tripod pocket
- Privacy mesh pocket for business cards
- High-denier nylon construction
- Cinch straps for total load security
- Arrow tote included
- Universal rain cover (included)



DELUXE RECURVE PACK NEW

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories.
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items.
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



UNIVERSAL RAIN COVER NEW

- Compatible with Deluxe & Club XT Recurve Backpacks



CLUB XT™ RECURVE PACK

- Affordable recurve backpack with a modern sophisticated design
- High-denier ballistic POLY fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: Grey, Blue, Red, Black



10-RING TEAM-COLOR PACK

- 1700 cubic inch/27 liter
- Bellowed front pocket
- Twin stretch hydration pockets
- YKK® zippers
- Hydration System compatibility
- Nylon 420D construction
- Colors: All Shown



720 TEAM-COLOR PACK

- Hydration System compatibility
- Durable Nylon 420D construction
- YKK® quality zippers
- Packs into itself for easy transport
- Integrated seat pad
- 1100 cubic inches, 18 liter capacity
- Colors: All Shown



CASE CUBES BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



ROLLER BOWCASE TRAVEL COVERS

- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot



BOW SLEEVE

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all bowcases



STABILIZER SYSTEM SLEEVE

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all bowcases



DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
 - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
 - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
 - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
 - Round Arrow Tote (12-arrow) - adjustable length



DELUXE ARM GUARDS ^{NEW}

- Progressive designs molded from durable, polycarbonate material.
- Durable elastic straps ensure a snug fit
- Available in oval and bone configurations
- Colors: Blue, Yellow, Red, Smoke



COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: Black



STIFF SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models XS, S, M, L, XL and XXL
- Colors: Black and White



DELUXE PARACORD DIAMOND SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange



DELUXE NEOPRENE WRIST SLINGS

- Durable, lightweight neoprene construction
- Easy-adjust strap
- Designs: Diamond Plate, Elk, Arrow and Whitetail



EASTON TEAM JERSEY

- Quick-dry moisture management
- Lightweight fabric
- Women: XS-XL
- Men: S-4XL



PRO TOUR™ JACKET AND VEST

- Soft-shell tech fabric
- Micro fleece lining
- Sizes: S-XXL



ORANGE STREAK TEE

- Mens: S-3XL



EDGE TEE

- Mens: S-3XL



COMPRESSION SHIRTS

- Thermal dynamic for comfort in hot and cold conditions
- Layer under shooter jerseys or hunting clothing
- Wicks moisture
- Compression comfort
- Sizes: S-XXL



PRO TOUR™ SUNGLASSES

BLUE STONE HAT NEW

- Adjustable Velcro strap



SHOOTER HAT NEW

- Sizes: S/M, L/XL



PRO-TOUR VISORS NEW

- One size fits all
- Colors: Grey or NEW Black

SHOOTER TOWEL

EASTON BUCKET HAT

- Sizes: S/M, L/XL



FITTED SHOOTER HAT

- One size fits most



SHED TEE

• Mens: S-3XL



TURKEY TEE NEW

• Mens: S-3XL



FMJ DIAMOND BILL HAT NEW

• One size fits most (adjustable)



EASTON BOWHUNTING HATS

• One size fits most (adjustable)
• Available in Brown or Black/Grey Mesh



ANTLER E HATS

• One size fits most (adjustable)
• Colors:
Realtree™ Max 1
Realtree™ Xtra



ANTLER E FLEX-FIT HATS

• One size fits most (adjustable)
• Colors:
Realtree™ Max 1
Realtree™ Xtra



TOXIC ANTLER E TEE

• Mens: S-3XL



VINTAGE NEW
ANTLER E TEE

• Mens: S-3XL

QUALITY TACKLE NEW
TEE

• Mens: S-3XL



CAMO ANTLER E NEW
SHORT AND LONG SLEEVE TEES

• Mens: S-3XL
• Colors:
Realtree™ Max 1
Realtree™ Xtra



LADIES ANTLER E HOODIE NEW

• Sizes: S-2XL
• Runs 1 Size Small



LADIES SILVER HEART TEE NEW

• Sizes: S-2XL



HUNTING COMBO NEW

• Includes Tee, Hat, and Wristlet
• Mens: S-3XL




BEGINNER BOWS

The Easton beginner bow is the perfect set up to get you started shooting archery. Easton has been building archery equipment since 1922, and that experience is built into a high quality recurve bow for long-lasting fun. The bow features a lightweight, slim, polymer technology riser and durable glass-reinforced limbs. At only 1.3 lbs., the Easton recurve is easy to handle and the ideal starter set up for any aspiring archer. With a smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.


- Ambidextrous design for either right or left-handed archers
- Integrated sight channel
- Custom Dacron string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Available in bow only and kit configurations
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard

Kit colors: Black, Pink, and Camo




XX75 BULK PACK

- Colors: pink and black

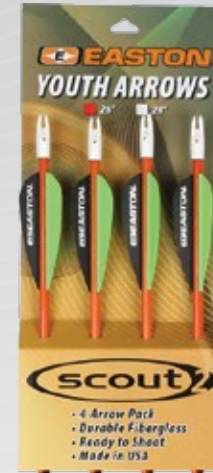

SCOUT 2™

- Durable fiberglass construction
- Over Nock – installed
- Sleeve Point – installed

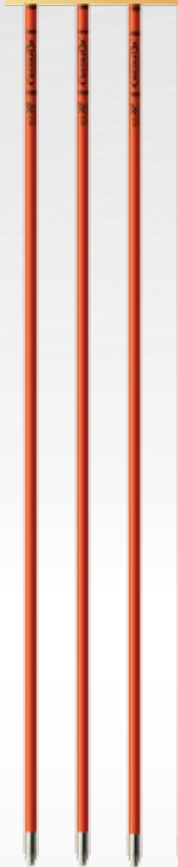

XX75®

- 7075 aerospace alloy
- Guaranteed straightness: ±.005
- Weight tolerance: ±2.5%
- Strength (psi): 90,000
- Size 1816
- Uses one-piece point and conventional nock

BEGINNER FINGER TAB

- Ambidextrous design works well for right and left handed archers



ARCHERY COMBO PACK

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high strength 28" arrows
- High strength 7075 aerospace-grade alloy
- Comfort-flex finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: Black and Pink



DEEP SIX™

Deep Six is the field proven thread standard for ultra-micro diameter (4MM & 5MM) arrows. Low-friction, high kinetic energy density Deep Six provides the **DEEPEST PENETRATION** ever seen with any arrow/broadhead system.



Deep Six™ Field Points
Fits G (4MM) & X (5MM) arrows with Deep Six thread inserts
100 & 125 Grains / Dozen Pack



Deep Six™ Steel G (4MM) HIT Insert
Fits G (4MM) diameter Carbon, A/C & FMJ Injection arrows
Uses Deep Six thread points
20 Grains / Dozen Pack



Deep Six™ Steel X (5MM) RPS Insert
Fits X (5MM) diameter FMJ, AXIS & Deep Six XD arrows
Uses Deep Six thread points
25 Grains / Dozen Pack



Deep Six™ (4MM) Nock
Fits G (4MM) diameter Carbon, A/C & FMJ Injection arrows
Dozen Pack / 100 ct bulk

POINTS



HP™ (6MM) Point
Fits H (6MM) diameter arrows
Point Weight – 80 & 100 Grains
Dozen Pack



CB™ (6.5MM) Point
Fits S (6.5MM) diameter arrows
Point Weight – 80 & 100 Grains
Dozen Pack

THREADED POINTS



RPS Screw-in Point — Nickel-plated Hardened Steel
17/64" – 50, 60, 70, 80, 90, 100, 110 grains
9/32" – 50, 60, 70, 80, 90, 100, 110 grains
Dozen Clamshell



Multi Point™
17/64" – 75, 85, 100 grains
9/32" – 75, 85, 100 grains
5/16" – 85, 100, 125 grains
11/32" – 85, 100, 125 grains
Dozen Clamshell
1000-count Box

UNI BUSHINGS



X-UNI™
Accepts X Nocks
Dozen Pack



G-UNI Bushings®
Dozen Pack



Super UNI Bushings®
Dozen Pack

INSERTS



Brass X (5MM) HIT® Break-Off Insert
75 – 50 Grains



X (5MM) HIT® Insert
16 grains
Dozen Pack



ST® (6MM) RPS Insert
18 grains
Dozen Pack and 100-count Bulk



H (6MM) Brass Insert
75 – 50 grains



MicroLite™ H (6MM) Insert
9 Grains
Dozen Pack



CB (6.5MM) Insert™
21 grains
Dozen Pack and 100-count Bulk



MicroLite™ S (6.5MM) Insert
9 grains
Dozen Pack



RPS Insert
Dozen Pack & 100-count Bulk



Aluminum Bolt Insert
43 Grains
Dozen Pack



Brass Bolt Insert
100 Grains
Dozen Pack

INDEXABLE NOCKS



G Nock™ (4MM) Precision-molded, Press-fit
Colors: black, white, green, orange, deep red, red
Dozen Pack and 100-count Bulk



H Nock™ (6MM)
Colors: black, white, blue, yellow, green, orange, deep red, pink
Dozen Pack



MicroLite™ Super Nock® (6.5MM)
Colors: blaze, emerald, yellow, red, smoke
Dozen Pack and 100-count Bulk



Deep Six™ G (4MM) Nock
Colors: deep red and blue
Dozen Pack and 100-count Bulk



Super Nock® & S Nock™ (6.5MM)
Colors: orange, green, yellow
Dozen Pack and 100-count Bulk



X (5MM) Nock™
Colors: black, white, yellow, green, orange, blue, smoke
Dozen Pack



3D Super Nock®, (6.5MM)
Colors: black, green, orange, white
Dozen Pack and 100-count Bulk



Halfmoon & Flatback Crossbow Bolt Nocks
Colors: orange, green
Dozen Pack and 100-count Bulk

CONVENTIONAL NOCKS



Conventional Nock—Swaged Shafts
Colors: black, green, orange, white, blue, red
Dozen Pack and 100-count Bulk

BROADHEAD ADAPTER RING (BAR)



(See arrow model pages for fitment) Use the BAR when required by broadhead design — fixed broadheads that utilize the face of the insert to support or hold the blades in place and mechanical broadheads that use the insert as a stop for the blades after opening require BAR's.
Dozen Clamshell Pack

FEATURES

- For use with carbon and A/C arrows
- Excellent for micro diameter arrows
- Provides superior broadhead alignment
- Protects shafts from hard impacts and blade expansion

V3™ Expandable Varmint Point

FEATURES

- Expandable action
- Flies exactly like field points
- Conventional thread or new Deep Six
- Helps prevent lost arrows
- Replaceable blades
- 100 grains
- Patent pending



V3 – 8-32 Thread



V3 – Deep Six Thread

HUNTING ARROW SIZE SELECTION CHARTS

ABOUT THE SELECTION CHARTS

EASTON'S SELECTION CHARTS ARE REGULARLY UPDATED TO REFLECT THE LATEST IN BOW PERFORMANCE. FOR 2015, WE HAVE MADE A FEW ADJUSTMENTS TO CERTAIN SIZE RECOMMENDATIONS BASED ON INCREASED BOW EFFICIENCIES AND MORE AGGRESSIVE CAM PROFILE DEVELOPMENTS. PLEASE READ OVER THE CHART AND ALL GUIDELINES BEFORE SELECTING ARROW SHAFTS BASED ON PRIOR EXPERIENCE.

Using the charts—Compound Bow

- Determine your correct arrow length (hunting or target) per diagram and instructions below.
- Determine correct peak bow weight (not holding weight) and draw length with the assistance of a qualified archery pro shop.
- Determine the ATA (Archery Trade Association) rating velocity of your bow
- Factor variables to the "standard compound setup" to determine CALCULATED bow weight. For compounds the "standard setup" includes use of a release aid and a brace height greater than 6.5". Deviations for the standard compound setup require factoring in EACH VARIABLE as follows:
 - A. Brace height lower than 6.5"- add 5 lbs to CALCULATED bow weight
 - B. Finger release- add 5 lbs to CALCULATED bow weight

Add the total of actual PEAK bow weight and all CALCULATED bow weight adjustments to determine final calculated weight. For example, with a 60 lb peak bow with a 6" brace height, calculated bow weight will be 60+5 for a calculated 65 lb bow weight. Now, in the "Calculated Peak Bow Weight" chart, select the column under the ATA range for your specific bow and your point weight. Follow the column down to your CALCULATED bow weight. Then, follow the chart to the right until you reach the column with your correct arrow length, and note the group letter (A-M). This letter will represent the suggested arrow group for your selection.

Using the charts—Recurve or Longbow (finger release)

It is critical that the correct bow weight be used when determining the weight column to be used on the chart. Actual peak bow weight should be measured at your correct draw length. Easton recommends the use of a dedicated bow scale or the assistance of a qualified pro shop for this purpose. Use the Recurve or Longbow ACTUAL weight chart on the right side of the chart to select the column corresponding to your bow type and point weight. Follow the column down to your bow weight and then follow the row to the left to find your suggested arrow group.

The Shaft Size listing below each group letter represents your suggested arrow shaft size. Note that providing incorrect weight or length information, or incorrect variable calculation, may result in an incorrect shaft size selection.

Easton recommends the use of a qualified pro shop to assist in correct arrow shaft selection.

CARBON SHAFT WEIGHTS (CARBWT)

Size	Spine	Carbon Bow Fire®	Deep Six XD	daTorch	Carbon Hex®	Aftermath	BloodLine	AXIS®	AXIS® Traditional	FlatLine
		Grs/In	Grs/In	Grs/In	Grs/In	Grs/In	Grs/In	Grs/In	Grs/In	Grs/In
700	0.700	-	-	-	-	-	-	6.1	-	-
600	0.600	-	-	-	-	-	-	7.2	7.9	-
500	0.500	-	-	-	-	7.5	-	8.1	8.9	6.5
480	0.480	7.5	-	6.3	6.3	-	6.8	-	-	-
490	0.490	-	8.1	-	-	-	-	-	-	-
400	0.400	8.5	9.0	7.2	7.2	8.8	7.7	9.0	9.8	7.4
340	0.340	-	9.5	-	-	9.6	-	9.5	10.3	8.2
330	0.330	9.6	-	7.9	7.9	-	8.7	-	-	-
295	0.295	-	10.7	-	-	-	-	-	-	-
300	0.300	-	-	-	-	10.2	-	10.7	-	-
260	0.260	-	-	-	-	-	-	11.5	-	-

COMPOUND BOW RELEASE AID • CALCULATED PEAK BOW WEIGHT - LBS.


ATA BOW RATING UP TO 300 FPS				ATA Bow Rating 301-340 FPS			
POINT WEIGHT				POINT WEIGHT			
75 (GRAINS) 65-85	100 (GRAINS) 90-110	125 (GRAINS) 115-135	150 (GRAINS) 140-160	75 (GRAINS) 65-85	100 (GRAINS) 90-110	125 (GRAINS) 115-135	150 (GRAINS) 140-160
40-44	37-41	34-38	31-35	35-39	32-36	29-33	26-30
45-49	42-46	39-43	36-40	40-44	37-41	34-38	31-35
50-54	47-51	44-48	41-45	45-49	42-46	39-43	36-40
55-59	52-56	49-53	46-50	50-54	47-51	44-48	41-45
60-64	57-61	54-58	51-55	55-59	52-56	49-53	46-50
65-69	62-66	59-63	56-60	60-64	57-61	54-58	51-55
70-75	67-72	64-69	61-66	65-69	62-66	59-63	56-60
76-81	73-78	70-75	67-72	70-75	67-72	64-69	61-66
82-87	79-84	76-81	73-78	76-81	73-78	70-75	67-72
88-93	85-90	82-87	79-84	82-87	79-84	76-81	73-78
94-99	91-96	88-93	85-90	88-93	85-90	82-87	79-84
100-105	97-102	94-99	91-96	94-99	91-96	88-93	85-90

ATA COMPOUND BOW RATING 341-350 FPS

Start in 301-340 FPS column and 100 grain point. Drop one row down in chart. Examples: 65 lb - 29 in - 345 FPS: drop down one row, still in Group J. 65 lb - 30 in - 345 FPS: drop down one row, shift from Group J to Group K.

ATA COMPOUND BOW RATING 351 FPS OR HIGHER

Start in 301-340 FPS column and 100 grain point. Drop two rows down in chart. Examples: 75 lb - 30 in - 355 FPS: drop down two rows, still in Group L. 75 lb - 31 in - 355 FPS: drop down two rows, shift from Group L to Group M.

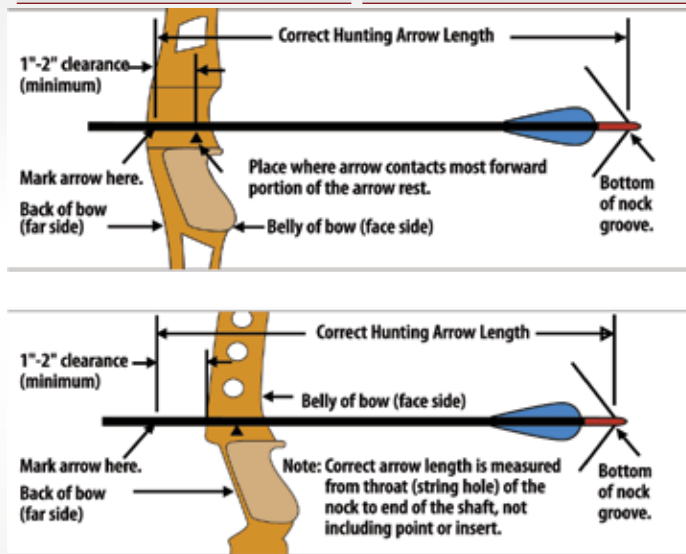

CORRECT HUNTING ARROW LENGTH

23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	33"	RECURVE BOW FINGER RELEASE ACTUAL PEAK BOW WEIGHT—LBS.				MODERN LONGBOW FINGER RELEASE ACTUAL PEAK BOW WEIGHT - LBS.			
											75 (grains) 65-85	100 (grains) 90-110	125 (grains) 115-135	150 (grains) 140-160	75 (grains) 65-85	100 (grains) 90-110	125 (grains) 115-135	150 (grains) 140-160
				A	B	B	C	C	D	E					41-46	38-43	35-40	32-37
				A	B	B	C	C	D	E	F				47-52	44-49	41-46	38-43
		A	B	B	C	C	D	E	F	G	H				53-58	50-55	47-52	44-49
	A	B	B	C	C	D	E	F	G	H	I				59-64	56-61	53-58	50-55
	B	B	C	C	D	E	F	G	H	I	J				65-70	62-67	59-64	56-61
	B	C	C	D	E	F	G	H	I	J	J				71-76	68-73	65-70	62-67
	C	C	D	E	F	G	H	I	J	J	K				77-82	74-79	71-76	68-73
	C	D	E	F	G	H	I	J	J	K	L				83-88	80-85	77-82	74-79
	D	E	F	G	H	I	J	J	K	L	L				89-94	86-91	83-88	80-85
	E	F	G	H	I	J	J	K	L	L	L				95-100	92-97	89-94	86-91
	F	G	H	I	J	J	K	L	L	L	M				101-106	98-103	95-100	92-97
	G	H	I	J	J	K	L	L	L	M	M				107-112	104-109	101-106	98-103
	H	I	J	J	K	L	L	L	M	M					113-118	110-115	107-112	104-109
	I	J	J	K	L	L	L	M	M						119-124	116-121	113-118	110-115

Size	Spine @ 28" Span	Model	Weight Grs/Inch	Size	Spine @ 28" Span	Model	Weight Grs/Inch	Size	Spine @ 28" Span	Model	Weight Grs/Inch	Size	Spine @ 28" Span	Model	Weight Grs/Inch
GROUP A				GROUP B				GROUP C				GROUP D			
1816	0.756	75	9.3	1816	0.756	75	9.3	2013	0.610	75	9.0	2016	0.531	75	10.6
600	0.600	Crbn	CarbWt	1916	0.623	75	10.0	1916	0.623	75	10.0	500	0.500	GG	10.6
700	0.700	Crbn	CarbWt	600	0.600	Carbn	CarbWt	600	0.600	ION	6.4	500	0.500	FMJ	9.1
				700	0.700	Carbn	CarbWt	600	0.600	Crbn	CarbWt	500	0.500	ION	7.3
								460	0.460	FMJINJEX	9.0	500	0.500	Crbn	CarbWt
								470	0.470	FMJGMM	8.8	490	0.490	Crbn	CarbWt
								480	0.480	Crbn	CarbWt	480	0.480	Crbn	CarbWt
GROUP E				GROUP F				GROUP G				GROUP H			
2114	0.510	75	9.9	2213	0.460	75	9.8	2215	0.420	75	10.7	2215	0.420	75	10.7
2018	0.464	75	12.3	2018	0.464	75	12.3	2117	0.400	75	12.0	2314	0.390	75	10.7
500	0.500	FMJ	9.1	400	0.400	GG	12.0	2020	0.426	75	13.5	2117	0.400	75	12.0
500	0.500	ION	7.3	500	0.500	FMJ	9.1	400	0.400	GG	12.0	2216	0.376	75	12.0
460	0.460	FMJINJEX	9.0	500	0.500	ION	7.3	400	0.400	FMJ	10.2	400	0.400	GG	12.0
500	0.500	Crbn	CarbWt	460	0.460	FMJINJEX	9.0	390	0.390	ACINJEX	9.5	400	0.400	FMJ	10.2
470	0.470	FMJGMM	8.8	500	0.500	Crbn	CarbWt	400	0.400	CBINJEX	8.9	390	0.390	ACINJEX	9.5
490	0.490	Crbn	CarbWt	470	0.470	FMJGMM	8.8	400	0.400	FMJINJEX	9.8	400	0.400	CBINJEX	8.9
480	0.480	Crbn	CarbWt	490	0.490	Crbn	CarbWt	400	0.400	Crbn	CarbWt	400	0.400	FMJINJEX	9.8
				480	0.480	Crbn	CarbWt	390	0.390	FMJGMM	9.7	400	0.400	Crbn	CarbWt
								390	0.390	FMJGMM	9.7				
GROUP I				GROUP J				GROUP K				GROUP L			
2413	0.365	75	10.4	2413	0.365	75	10.4	2317	0.297	75	13.3	2317	0.297	75	13.3
2314	0.390	75	10.7	2315	0.340	75	11.7	300	0.300	GG	13.3	300	0.300	GG	13.3
2315	0.340	75	11.7	2219	0.337	75	13.8	300	0.300	FMJ	12.0	300	0.300	FMJ	12.0
2216	0.376	75	12.0	340	0.340	GG	11.7	300	0.300	Crbn	CarbWt	300	0.300	Crbn	CarbWt
340	0.340	GG	11.7	340	0.340	FMJ	11.3	300	0.300	DngrGame	15.5	250	0.250	DngrGame	17.2
400	0.400	FMJ	10.2	330	0.330	ACINJEX	10.5	295	0.295	Crbn	CarbWt	295	0.295	Crbn	CarbWt
390	0.390	ACINJEX	9.5	330	0.330	CBINJEX	10.0	260	0.260	Crbn	CarbWt	260	0.260	Crbn	CarbWt
400	0.400	CBINJEX	8.9	330	0.330	FMJINJEX	11.0	320	0.320	FMJGMM	10.6	280	0.280	FMJINJEX	12.0
400	0.400	FMJINJEX	9.8	300	0.300	DngrGame	15.5	280	0.280	FMJINJEX	12.0				
400	0.400	Crbn	CarbWt	340	0.340	Crbn	CarbWt								
390	0.390	FMJGMM	9.7	330	0.330	Crbn	CarbWt								
				320	0.320	FMJGMM	10.6								

To determine weight at your shaft length, multiply your actual shaft length by the grains-per-inch (gpi), not including point, insert, or UNI Bushing.

GROUP M	KEY
250	Size Indicates suggested arrow size
260	Spine Spine of shaft size shown (static)
280	CarbWt Refer to Carbon box (left) for specific model and weight
	FMJ Full Metal Jacket 5MM
	FMJINJEX Full Metal Jacket Injexion 4MM
	FMJGMM Full Metal Jacket 6MM
	DngrGame Full Metal Jacket Dangerous Game
	ACINJEX A/C Injexion
	CBINJEX Carbon Injexion
	75 XX75: Legacy, Camo Hunter, (7075-T9 alloy)
	GG Game Getter
	ION ION
	Crbn Deep Six XD, AXIS, AXIS Traditional, Carbon Hexx, daTorch, Aftermath, BloodLine, FlatLine, and Bowfire.

If your arrow shaft is over 1/2" inch more than the closest inch column shown, round up to the next inch column. Example, if your arrow length measures 28 - 1/2", use the 29" column.

2016 HUNTING SHAFT MODELS

ALLOY/CARBON	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes	
A/C INJEXION™	High-strength carbon fiber bonded to a precision 7075 alloy core tube	Deep Six HIT® Insert	Deep Six Point	Internal-fit	Deep Six Nock™	±0.5 grains	±.002" guaranteed	Black, Micro-smooth 9-micron	450, 390, 330	
CARBON CORE	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance⁴	Straightness¹	Color/Finish	Sizes	
FMJ INJEXION™ 4MM	Precision 7075 alloy jacket bonded to a carbon core	Deep Six HIT® Insert	Deep Six Point	Internal-fit	Deep Six Nock™	±2 grains	±.002" guaranteed	Black Carbon, Diamond Pattern	460, 400, 330, 280	
FMJ™ 5MM	Precision 7075 alloy jacket bonded to a carbon core	HIT® Insert or Deep Six RPS	Deep Six or RPS Point	Internal-fit	X Nock™	±2 grains	±.002" guaranteed	Black, Diamond Pattern	500, 400, 340, 300	
FMJ DANGEROUS GAME™	Precision 7075 alloy jacket bonded to a carbon core	Brass HIT® Insert or Deep Six RPS	Deep Six or RPS Point	Internal-fit	X Nock™	±5 grains	±.002" guaranteed	Black, Diamond Pattern	300, 250	
FMJ™ 6MM	Precision 7075 alloy jacket bonded to a carbon core	ST RPS Insert	RPS Point	Internal-fit	H Nock™	±2 grains	±.003" guaranteed	Two-Tone Gunmetal/Silver	500, 400, 340, 300	
CARBON	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance⁴	Straightness¹	Color/Finish	Sizes	
DEEP SIX™ XD	SuperLite Carbon multi-layer wrapped fibers	Deep Six Steel RPS Insert	Deep Six Point	Internal-fit	X Nock™	±2 grain	±.003"	Black, Micro-smooth 9-micron	490, 400, 340, 295	
BOW FIRE™	UltraLite carbon composite fibers	CB Insert	CB or RPS Point	Internal-fit	S Nock™	±1 grain	±.003"	Detailed Graphic Overlay	480, 400, 330	
CARBON INJEXION™	High-strength carbon construction fibers	Deep Six HIT® Insert	Deep Six Point	Internal-fit	Deep Six Nock™	±0.5 grain	±.003"	Black, Micro-smooth 9-micron	480, 400, 330	
AXIS®	High-strength carbon-composite fibers	HIT® Insert	Deep Six or RPS Point	Internal-fit	X Nock™	±2 grains	±.003"	Black, Micro-smooth	700, 600, 500, 400, 340, 300	
AXIS® TRADITIONAL	High-strength carbon-composite fibers	HIT® Insert or Brass HIT® Insert	Deep Six or RPS Point	Internal-fit	X Nock™	±2 grains	±.003"	Wood grain Graphic PhotoFusion	600, 500, 400, 340	
BLOODLINE™	High-strength carbon-composite fibers	HP Insert	HP or RPS Point	Internal-fit	H Nock™	±2 grains	±.003"	Black, Micro-smooth	480, 400, 330	
DA'TORCH™	UltraLite carbon composite fibers	HP Insert	HP or RPS Point	X-Uni System	X Nock™	±1 grain	±.001"	Detailed Graphic Overlay	480, 400, 330	
HEX™	UltraLite carbon composite fibers	MicroLite H Insert	HP or RPS Point	Internal-fit	H Nock™	±1 grain	±.001"	Black, Micro-smooth	480, 400, 330	
FLATLINE™	SuperLite Carbon multi-layer wrapped fibers	MicroLite Insert	CB or RPS Point	Internal-fit	MicroLite Super Nock	±2 grains	±.003"	Black, Matte	500, 400, 340	
AFTERMATH™	High-strength carbon-composite fibers	ST RPS Insert	HP or RPS Point	Internal-fit	H Nock™	±2 grains	±.005"	Black, Micro-smooth	500, 400, 340, 300	
ION™	High-strength carbon-composite fibers	HP Insert	RPS Point	Internal-fit	H Nock™	±2 grains	±.003"	Black, Micro-smooth	600, 500	
ALLOY	Alloy	Strength³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance	Straightness¹	Color/Finish	Sizes
CAMO HUNTER™	7075-T9	96,000	RPS Insert	One-piece Bullet, or Field Point	Super UNI System or X UNI System	Super Nock, 3D Super Nock X Nock or MicroLite™ Nock	±1%	±.002" guaranteed	4-Tone Black, Brown, Dark Green, & Light Green Dye Camo	1816, 1916, 2013, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2314, 2315, 2317, 2413
LEGACY™	7075-T9	95,000	RPS Insert	One-piece Bullet, or Field Point	Full-diameter Taper Swage	Conventional	±1%	±.002" guaranteed	Cedar-Grain, PermaGraphic	1916, 2016, 2018, 2117, 2216, 2219
GAMEGETTER™	7075-T9	96,000	RPS Insert	One-piece Bullet, or Field Point	Super UNI System Composite Bushing	Super Nock or 3D Super Nock	±134%	±.003" guaranteed	Black, Hard-anodized	500, 400, 340, 300
FIBERGLASS	Alloy	Strength³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance	Straightness¹	Color/Finish	Sizes
SCOUT 2™	Fiberglass	Not Available	Not Available	Steel Sleeve Point	Open-ended slip-on	Over Nock	N/A	N/A	Orange	17/64"

CROSSBOW

CARBON CORE	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes	
FMJ™ CROSSBOW	Precision 7075 alloy jacket bonded to a carbon core	HP Bolt Insert	RPS Point	Internal-fit	Halfmoon, Flatback nocks	±.2 grains	±.003"	Black, Diamond Pattern	20, 22	
CARBON	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance⁴	Straightness²	Color/Finish	Sizes	
BOWFIRE BOLT™	SuperLite Carbon multi-layer wrapped fibers	HP Bolt Insert	RPS Point	Internal-fit	Halfmoon, Flatback nocks	±.2 grains	±.003"	Detailed Graphic Overlay	20, 22	
BLOODLINE™	SuperLite Carbon multi-layer wrapped fibers	HP Bolt Insert	RPS Point	Internal-fit	Halfmoon, Flatback nocks	±.2 grains	±.003"	Black, Micro-smooth 9-micron	20, 22	
ALLOY	Alloy	Strength³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance	Straightness¹	Color/Finish	Sizes
MAGNUM XX75™	7075-T9	96,000	RPS Insert	RPS Point	Internal-fit	Halfmoon, Flatback nocks	±.2 grains	±.003"	Gray anodize	20, 22

1 Guaranteed straight to more stringent standards than ATA/ ASTM methods.
2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.
3 Tensile strength value may vary ±3%.
4 Grains-per-shafts in a dozen bundle.
5 RPS = Replaceable Point System with 8-32 ATA Standard thread.
6 All components are ±1 grain.
7 Super UNI Bushing accepts Super Nock, 3D Nock, "S" Nock and MicroLite Super Nock.
8 GameGetter composite bushing weight: 300 & 340=9 grains, 400=5 grains, 500=3 grains.
9 GameGetter sizes indicated in parentheses.
10 GameGetter sizes indicated in parentheses.
Notes: Shaft size 1816 use BAR6; size 1916 uses BAR8 Broadhead Adapter Rings.

Lost Camo is a registered trademark of MCP IP LLC.
Realtree™ is a registered trademark of Jordan Outdoors.

ALLOY SHAFT AND COMPONENT SPECIFICATIONS

Size ¹¹	Shaft Weight		Stock Length ³ XX75 ¹	Conventional Nock Size ⁴	UNI System ⁵			One-piece Bullet Point	RPS ⁷ Insert Alum.	RPS ⁷ Point Size
	XX75 ¹	Spine @ 28" Span			UNI Bushing ⁶	X Nock Bushing ⁶	Super UNI Bushing ⁶			
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains	Grains	Grains	Grains ⁹	Grains ⁹	Grains ⁹
1816	9.3	0.756	30	3/32	8	4	—	74	12	3/32
1916	10.0	0.623	31	3/32	9	7	—	82	16	5/16
2013	9.0	0.610	32	5/16	—	—	5	—	21	5/16
2016 (500)	10.6	0.531	32	5/16	—	—	4 ¹⁰	90	20	5/16
2018	12.3	0.464	30 1/2	5/16	—	—	4	—	19	5/16
2020	13.5	0.426	32	5/16	—	—	—	—	18	5/16
2114	9.9	0.510	31	—	(11)	—	7	100	25	5/16
2117 (400)	12.0	0.407	31 1/2	5/16	—	—	7 ¹⁰	100	25	5/16
2213	9.8	0.458	31	—	(13)	—	9	100	30	11/32
2215	10.7	0.419	31 1/2	—	—	—	9	100	30	11/32
2216	12.0	0.376	32	11/32	—	—	9	100	29	11/32
2219	13.8	0.337	32	11/32	—	—	8	—	26	11/32
2314	10.7	0.391	32	—	(14)	—	10	100	34	11/32
2315 (340)	11.7	0.342	32	—	—	—	11 ¹⁰	100	37	11/32
2317 (300)	13.3	0.297	32	—	—	—	11 ¹⁰	100	37	11/32
2413	10.4	0.365	32	—	(17)	—	12	100	40	11/32

— Indicates not available
1 XX75 Camo Hunter, GameGetter, Legacy
2 Length is approximate stock shaft length for each size.
3 Nock size for conventional swaged nock taper.
4 UNI—Universal Nock Installation System.
5 Parentheses indicate smaller G Nock UNI Bushing size is available as an optional accessory.
6 RPS = Replaceable Point System with 8-32 ATA Standard thread.
7 All components are ±1 grain.
8 Super UNI Bushing accepts Super Nock, 3D Nock, "S" Nock and MicroLite Super Nock.
9 GameGetter composite bushing weight: 300 & 340=9 grains, 400=5 grains, 500=3 grains.
10 GameGetter sizes indicated in parentheses.
Notes: Shaft size 1816 use BAR6; size 1916 uses BAR8 Broadhead Adapter Rings.

⚠ WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE @ www.bsafe.ws or 877-INFO-ETP.

ARROW BREAKAGE

Any arrow can become damaged. A damaged arrow could break upon release and injure you or a bystander. Damage to an arrow shaft, or any of its components, may occur from: improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft, nock, and other components to see that they have not been damaged. Before shooting, place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged. If your arrow is crested, inspect for damage on the crest surface. You may need to remove the cresting to make a thorough inspection. If shaft damage is present, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

Before each shot, inspect the nock for damage. If the nock is damaged, replace the nock. **NEVER SHOOT AN ARROW WITH A DAMAGED NOCK.** Before each shot, check that the nock is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or the fit is loose (rotates easily), inspect further for cracks in the nock end of the arrow shaft. If applicable, you may need to remove the cresting to make a thorough inspection. If there are cracks in the shaft or the nock is loose, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

LIMITED WARRANTY

The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see www.eastonhunting.com.

ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:

- Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel and listen for cracking. Perform this test four to six times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged. **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**
- While still holding the point and fletching ends, twist the shaft in opposite directions. If the arrow "relaxes" or twists easily, the carbon has been damaged. **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**



A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.** If you do not understand these instructions, or cannot adequately perform the above tests, seek the appropriate assistance.